
# ERKADD CATALOGUE 2021



1

EN

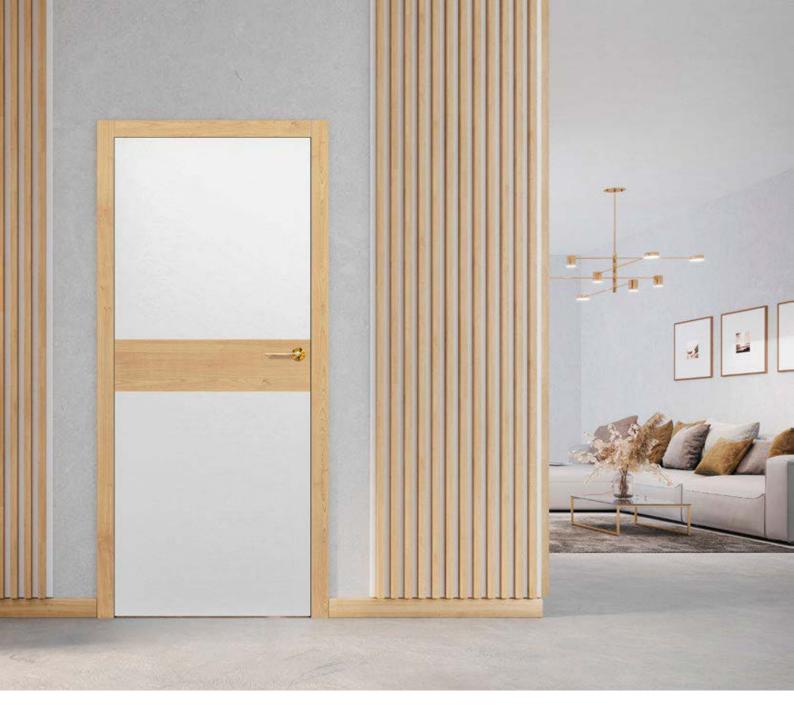

# **ERKADD**

Every house is fitted with interior doors. This is why approaching doors only from the point of view of their functionality and practicality has long been insufficient. Underlining the best qualities in a perfectly furnished house, today they are an important component of interior design. For this reason, we create modern solutions, introduce attractive design and focus on the quality of workmanship to let you enjoy the choice of the Erkado doors.

We are committed to developing all business areas relevant for creating a product that meets your expectations. We achieve this goal by investing in technologically advanced production lines, staff training and systematic analysis of consumer needs. Our dynamic development would be impossible without the activity of the sales network participants.

Thank you for your inspiring suggestions and friendly feedback.










# CONTENTS

STILE DOORS			6
	6	IRYS	
	8	DAGLEZJA	
SURMIA	10	FREZJA	
	12		
		BERBERYS	
EWODIA		FLOKS	
NOLINA		KROKUS	
MAGNOLIA		KAMELIA	
PODWOJNIK		PETUNIA	50
	26	AZALIA	
	28	HIACYNT	
LAWENDA BEST PRICE!	30		56
GRAF GLASS DOORS			58
LACQUERED DOORS			62
UNO PREMIUM		MILDA	
	64	BALDUR	
	66	ANUBIS	76
NEMEZJA NEW	68	SYLENA	78
	70		
			80
BALDUR ALTAMURA		MENTON SORANO	
ANSEDONIA		SURANU	
			00
INTERIOR FRONT DOORS			98
FORTECA RC2	98	FIXED AND ADJUSTABLE DOOR FRAME	
FORTECA RC3	98	FOR THE HERSE SET SERIES	110
	102	STEEL DOOR FRAMES	
	103	FOR THE FORTECA HERSE SET SERIES	112
HERSE SET HERSE MAX SET	104	UNITED STEEL DOOR FRAME NEW	כוו
INTERIOR FIRE PROTECTION FRONT DOORS			
LEDA EI30 LEDA EI60 WOODEN DOOR FRAME FOR THE LEDA SERIES	.114	STEEL DOOR FRAMES FOR THE LEDA SERIE	<b>S</b> 116
LEDA EI60	.114	DOUBLE-LEAF LEDA EI30 & EI60	117
WOODEN DOOR FRAME FOR THE LEDA SERIES.	.116	HYPERION EI30 RC2	118
			120
TECHNICAL INFORMATION			
			134
WALL-MOUNTED SLIDING DOOR SYSTEMS			
POCKET SLIDING DOOR SYSTEMS			
DOUBLE-LEAF DOORS			
FOLDING DOORS			147
COVERT CONCEALED DOOR SYSTEM			
DOOR FRAMES			
TUNNEL TYPE ADJUSTABLE DOOR FRAME			
STEEL DOOR FRAME			
ADJUSTABLE CASING FRAME FOR STEEL DOOR			
REVERSE DOOR FRAME		C	
ADJUSTABLE DOOR FRAME FOR NON-REBATED DOORS			
ADJUSTABLE DOOR FRAME FOR NON-REBATED			
ADJUSTABLE DUUK FRAME FUR NUN-REBATEL	NUOR	۵	102





COLOURS AVAILABLE FOR INTERIOR DOORS

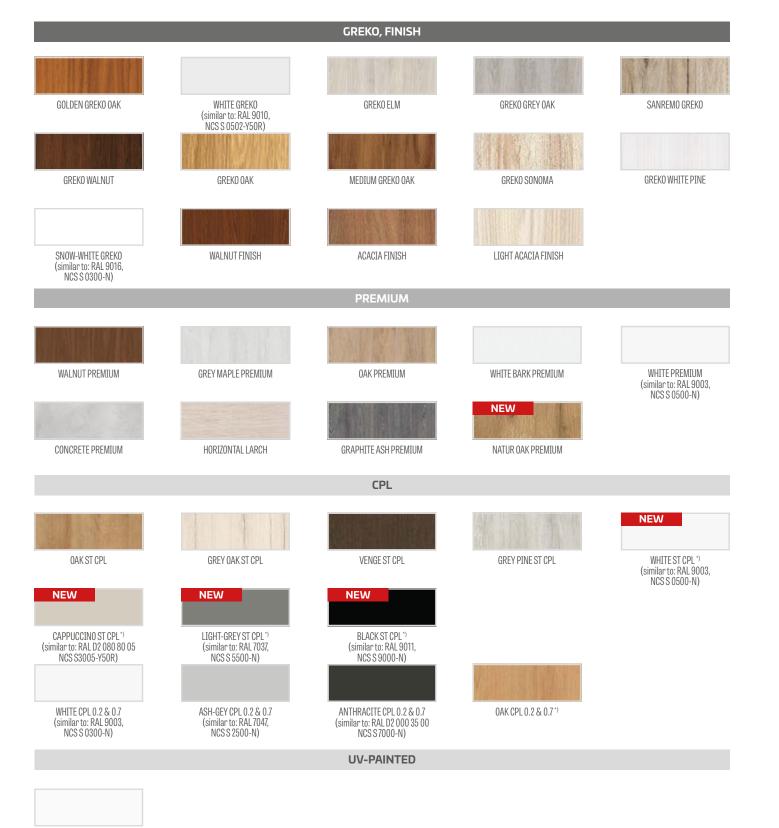


WHITE TITANIUM UV (similar to: RAL 9003, NCS S 0500-N)

Read more on decors on p. 129



**REBATED AND NON-REBATED** 



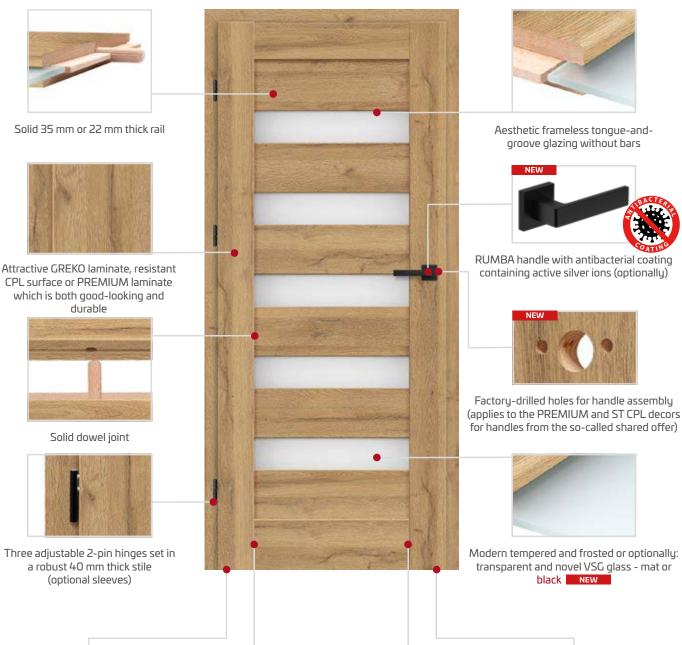



A drop-down gasket (alternatively)



MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW



Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating



Concealed magnetic stop (optionally) NEW





MISKANT 2, leaf laminate NATUR OAK PREMIUM, frame laminate BLACK ST CPL, handle BELLA slim black matt



MISKANT1





MISKANT 2





MISKANT 3





MISKANT 4

MISKANT 5

MISKANT 6



GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) PREMIUM WALNUT PREMIUM **GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH** PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL NEW VENGE ST CPL WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPI NEW NEW GREY PINE ST CPL CAPPUCCINO ST CPL<sup>4)</sup> LIGHT-GREY ST CPL<sup>4)</sup> BLACK ST CPL<sup>4)</sup>

Glulam wood stile for the PREMIUM and CPL laminates

without the AntiFinger coating

#### MDF stile for the GREKO and CPL laminates with the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

- <sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa
- <sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- toughened transparent or frosted glass with a thickness of 4 mm
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- black lines of 18 mm in width (thickness)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket <sup>2)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup> pages 120 to 127

#### STANDARD AWERS (OBVERSE) GLAZING




#### MADE TO ORDER "REVERSE" GLAZING








LAURENCJA 1, PREMIUM WHITE laminate, black VSG glass, CUBE PREMIUM handle, black matt

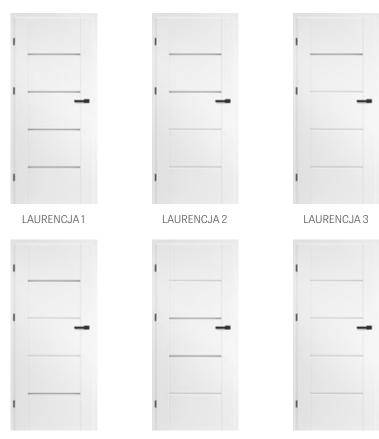

LAURENCJA 4

LAURENCJA 6









MDF stile for CPL laminates with the AntiFinger coating **NEW** 

PREMIUM and CPL laminates without the AntiFinger coating

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with CPL or PREMIUM laminate
- very wide crossbar 35 mm
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut
plastic woodgrain sleeves (4 pcs)
round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black
ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100
"100" rebated and non-rebated door leaf
frosted or black VSG 221 laminated safety glass, <b>NEW</b> plain on both sides
metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)
drop-down gasket <sup>2)</sup>
can be replaced with a black magnetic lock for non-rebated door leave
magnetic stop (buffer) <sup>2)</sup> <b>NEW</b> (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127

<sup>1)</sup> plain white laminate imitating a painted surface

 $^{\mbox{\tiny 2)}}$  the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> special AntiFinger coating to reduce dirt and fingerprints





SURMIA 1, WENGE ST CPL laminate, CUBE handle - bushed chrome, mat



SURMIA1



SURMIA 2



SURMIA 3




SURMIA 4



GRAIN PATTERN \*)









MDF stile for CPL laminates with the AntiFinger coating **NEW** 

without the AntiFinger coating

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 22 mm and 4 mm thick HDF panels with CPL or PREMIUM finish
- 35 mm thick, very wide crossbar
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127

<sup>1)</sup> plain white laminate imitating a painted surface
<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> special AntiFinger coating to reduce dirt and fingerprints







BUDLEJA1





BUDLEJA 2





BUDLEJA 3







BUDLEJA 4



BUDLEJA 8

BUDLEJA 5

BUDLEJA 6



WALNUT PREMIUM **GREY MAPLE PREMIUM** OAK PREMIUM **GRAPHITE ASH** PRFMILIM NATUR OAK PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) CPL WHITE ST CPL 1) 3) OAK ST CPL GREY OAK ST CPL VENGE ST CPL GREY PINE ST CPL CAPPUCCINO ST CPL<sup>3)</sup> LIGHT-GREY ST CPL<sup>3)</sup> BLACK ST CPL 3)





<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- very wide crossbar 35 mm
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);
brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127

13





WIDTH 80



EPIMEDIUM 1\*)

WIDTH 70



EPIMEDIUM 1\*)





EPIMEDIUM 2 \*)



EPIMEDIUM 3 \*)



EPIMEDIUM 3 \*)



EPIMEDIUM 4 \*)



EPIMEDIUM 4 \*)



EPIMEDIUM 5 \*)



EPIMEDIUM 5 \*)

\*) The pictures show only the EPIMEDIUM doors with 80 and 70 cm wide leaves.

The glazing to vertical bars ratio in the other width options differs considerably, which can be the key factor regarding the customer's product choice. For the other width options go to www.erkado.pl



GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) PREMIUM WALNUT PREMIUM **GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH** PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL NEW GREY OAK ST CPL VENGE ST CPL WHITE ST CPL 1) 4) OAK ST CPL NEW NEW GREY PINE ST CPL CAPPUCCINO ST CPL<sup>4)</sup> LIGHT-GREY ST CPL<sup>4)</sup> BLACK ST CPL<sup>4)</sup>



Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

with the AntiFinger coating NEW

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- narrow, long crossbar of 22 mm
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- depending on the leaf width, the glazing widths differ. Check at www.erkado.pl

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

plastic woodgrain sleeves (4 pcs)
round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black
ventilation grille (only for door leaf widths of 80, 90, 100)
"100" rebated and non-rebated door leaf
frosted VSG 221 laminated safety glass, plain on both sides
metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black);
drop-down gasket <sup>2)</sup>
can be replaced with a black magnetic lock for non-rebated door leaves
magnetic stop (buffer) <sup>2)</sup> <b>NEW</b> (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup> pages 120 to 127





ARALIA 2, laminate WHITE PREMIUM BARK, handle RUMBA antibacterial, black



ARALIA1





ARALIA 2

ARALIA 3



PREMIUN

**OAK PREMIUM** 

**GRAPHITE ASH** 

PREMIUM

**GREY MAPLE PREMIUM** 

WHITE BARK PREMIUM

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and with PREMIUM surface
- 16 mm thick HDF panels with PREMIUM finish (vertical grain direction)
   optionally, against an extra charge, upper panels extending the frame page 134


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, plain on both sides, against an additional charge
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket <sup>1)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127



Glulam timber stile for PREMIUM and CPL laminates

<sup>1)</sup> the stop prevents application of a drop-down gasket and vice versa

WALNUT PREMIUM

NATUR OAK PREMIUM





EWODIA 4, OAK PREMIUM laminate, round matt brushed chrome LUNA PREMIUM handle



EWODIA1



EWODIA 2



EWODIA 3

EWODIA 4



PREMIUM

WALNUT PREMIUM

NATUR OAK PREMIUM



WHITE BARK PREMIUM

OAK PREMIUM

GRAPHITE ASH PREMIUM

TELDE

Glulam timber stile for PREMIUM and CPL laminates

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and with PREMIUM surface
- 16 mm thick HDF panels with PREMIUM finish (vertical grain direction)
   optionally, against an extra charge, upper panels extending the frame page 134


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, plain on both sides, against an additional charge
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket<sup>1)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127

Presented model: EWODIA1 in OAK PREMIUM finish with round matt brushed chrome LUNA PREMIUM handle





NOLINA 1, laminate GREY PREMIUM MAPLE, TOPAZ INOX handle



NOLINA 1



NOLINA 2



NOLINA 3



PREMIUN

WALNUT PREMIUM

NATUR OAK PREMIUM

**GREY MAPLE PREMIUM** 

**OAK PREMIUM** 

**GRAPHITE ASH** 

PREMIUM

WHITE BARK PREMIUM



Glulam timber stile for PREMIUM and CPL laminates

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and with PREMIUM . surface
- 16 mm thick HDF panels with PREMIUM finish (vertical grain direction) optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame **NEW**
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### **GLAZING**

- frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, plain on both sides, against an additional charge
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### **AVAILABLE DOOR LEAF WIDTHS**



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127 NEW









MAGNOLIA1



MAGNOLIA 5



MAGNOLIA 2



MAGNOLIA 6



MAGNOLIA 3







MAGNOLIA 4



MAGNOLIA 8



	GRE	EKO	
			12 25 14
GREKO WALNUT	GREKO ELM	GREKO OAK	GREKO GREY OAK
1 ALLAN		WE HELL	
GREKO SONOMA	GREKO WHITE PINE	MEDIUM GREKO OAK	GOLDEN GREKO OAK
SANREMO GREKO	WHITE GREKO 1)	SNOW-WHITE GREKO 1)	
	PREN	MUM	
erstu			
WALNUT PREMIUM	GREY MAPLE PREMIUM	OAK PREMIUM	GRAPHITE ASH PREMIUM
NEW			PREIMIUM
NATUR OAK PREMIUM	WHITE BARK PREMIUM	WHITE PREMIUM 1)	
	CF	րլ	
NEW			
WHITE ST CPL 1) 4)	OAK ST CPL	GREY OAK ST CPL	VENGE ST CPL
	NEW	NEW	NEW
GREY PINE ST CPL	CAPPUCCINO ST CPL <sup>4)</sup>	LIGHT-GREY ST CPL <sup>4)</sup>	BLACK ST CPL <sup>4)</sup>
-	-	- PERSONAL PROPERTY	171-
for the GREKO and	d CPL Jaminates	Glulam wood st	ile for the

MDF stile for the GREKO and CPL laminates with the AntiFinger coating

PREMIUM and CPL laminates without the AntiFinger coating

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket<sup>2)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section in our offer <sup>3</sup>, pages 120 to 127 **NEW** 

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints





PODWOJNIK 5, laminate GREY OAK ST CPL, TOPAZ INOX handle



PODWOJNIK1



PODWOJNIK 2










PODWOJNIK 5





MDF stile for CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with CPL or PREMIUM laminate
- central crossbars of 22 mm in thickness and a very wide upper and bottom crossbar of 35 mm
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### **AVAILABLE DOOR LEAF WIDTHS**



#### **ADDITIONAL CHARGES**

ventilation cut
plastic woodgrain sleeves (4 pcs)
round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black
ventilation grille (only for door leaf widths of 80, 90, 100)
"100" rebated and non-rebated door leaf
frosted VSG 221 laminated safety glass, plain on both sides
metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)
drop-down gasket <sup>2)</sup>
can be replaced with a black magnetic lock for non-rebated door leaves
magnetic stop (buffer) <sup>2)</sup> <b>NEW</b> (available in six colours p. 132)
factory-drilled openings for through-mounting applies to double-section

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup> pages 120 to 127 **NEW** 









JUKA1









JUKA 3





JUKA 4



JUKA 5

JUKA 6


JUKA 7

JUKA 8

# **BEST PRICE!**



### GREKO

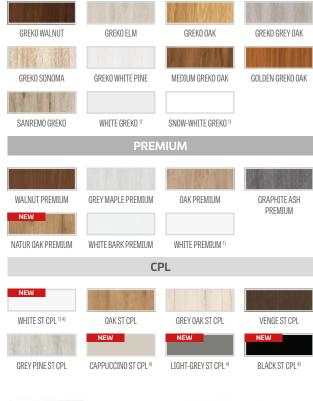





MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs.); finish: brushed nickel, patina white and black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, **NEW** plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 





FORSYCJA 1, door-leaf laminate WHITE GREKO, door-frame laminate OAK PREMIUM, handle: BELLA slim, black matt



FORSYCJA1





FORSYCJA 2





FORSYCJA 3





FORSYCJA 4



FORSYCJA 5

FORSYCJA 6

FORSYCJA 7

FORSYCJA 8

28











MDF stile for the GREKO and CPL laminates with the AntiFinger coating

PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- optionally, against an additional charge, upper panels extending the frame - page 134


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### **AVAILABLE DOOR LEAF WIDTHS**



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 







LAWENDA1





LAWENDA 2





LAWENDA 3





LAWENDA 7, laminate GREKO OAK, DECO handle

LAWENDA 4





LAWENDA 5

LAWENDA 6

LAWENDA 7

LAWENDA 8

LAWENDA 9

# **BEST PRICE!**



#### GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) PREMIUM WALNUT PREMIUM GREY MAPLE PREMIUM **OAK PREMIUM** GRAPHITE ASH PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL NEW WHITE ST CPI 1) 4) OAK ST CPL GREY OAK ST CPI VENGE ST CPI NEW NEW GREY PINE ST CPL CAPPUCCINO ST CPL<sup>4)</sup> LIGHT-GREY ST CPL<sup>4)</sup> BLACK ST CPL<sup>4)</sup>





MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black
ventilation grille (only for door leaf widths of 80, 90, 100)
"100" rebated and non-rebated door leaf
frosted or black VSG 221 laminated safety glass, <b>NEW</b>

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 







IRYS1



IRYS 2







IRYS 3









IRYS 5

IRYS 6

IRYS 7

IRYS 8

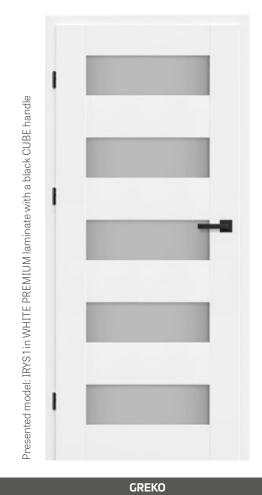

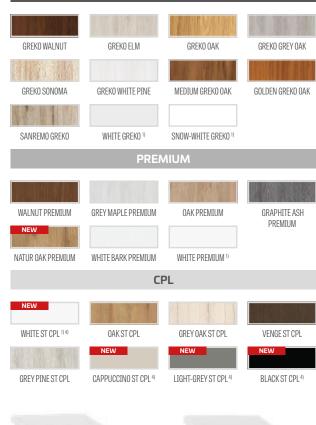





without the AntiFinger coating

MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 





DAGLEZJA 1, laminate GREKO GREY OAK, CUBE SLIM handle, square, black matt



DAGLEZJA 1





DAGLEZJA 2





DAGLEZJA 3





DAGLEZJA 4



DAGLEZJA 7

DAGLEZJA 8

34


DAGLEZJA 5

DAGLEZJA 6



GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK WHITE GREKO 1) SNOW-WHITE GREKO 1) PREMIUM WALNUT PREMIUM **GREY MAPLE PREMIUM OAK PREMIUM** GRAPHITE ASH PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL NEW WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPI VENGE ST CPI NEW NEW GREY PINE ST CPL CAPPUCCINO ST CPL<sup>4)</sup> LIGHT-GREY ST CPL<sup>4)</sup> BLACK ST CPL<sup>4)</sup>





with the AntiFinger coating NEW

without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate very wide crossbar
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame **NEW**
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### **GLAZING**

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black **NEW** plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



#### **AVAILABLE DOOR LEAF WIDTHS**



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 









FREZJA1



FREZJA 2





FREZJA 3



FREZJA73)



FREZJA 4



FREZJA 8





FREZJA 4





ventilation cut


<sup>2)</sup> FREZJA 8 - 8 mm thick glazing <sup>3)</sup> FREZJA 7 – with a mirror only and a selected finish on the other side. Obverse – a mirror fitted on the hinge side (as shown in the photo)

FREZJA 5

36





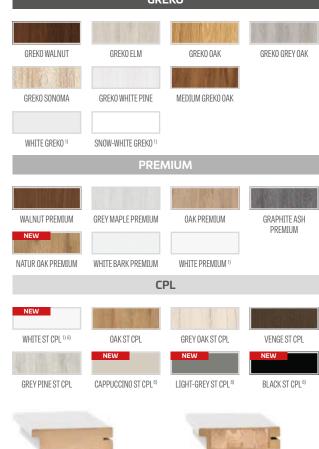

Glulam wood stile for the PREMIUM and CPL laminates

without the AntiFinger coating

MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> not available in FREZJA 8

<sup>3)</sup> FREZJA 8 is not available for sliding systems

<sup>4)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>5)</sup> applies only to the PREMIUM and ST CPL decors

<sup>6)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 16 mm thick HDF panels (also a 4 mm panel for the FREZJA 2 & 6 models) covered with the GREKO, CPL or PREMIUM laminate; FREZJA 7 is available with a mirror only
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW


# HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame **NEW**
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- · 4 mm frosted or transparent tempered glass or a mirror fitted on one side (only Freesia 7) as a standard and a VSG 221 frosted or black **NEW** safety glass, plain on both sides (does not apply to Freesia 7, 8)
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- fixed glazing widths: FREZJA 1-140 mm, FREESIAO 5-70 mm

# AVAILABLE SOLUTIONS 3) (pp. 135-143)



# **AVAILABLE DOOR LEAF WIDTHS**



# **ADDITIONAL CHARGES**

ventilation cut	
-----------------	--

plastic woodgrain sleeves (4 pcs) <sup>2)</sup>
round and square metal round and square metal slee ves <sup>2)</sup> (4 pcs.); brushed nickel or patina finish white and black
ventilation grille <sup>2)</sup> (only for door leaf widths of: 80, 90, 100
"100" rebated and non-rebated door leaf
frosted or black VSG 221 laminated safety glass, <b>NEW</b> plain on both sides
metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)
drop-down gasket gasket <sup>4)</sup> (not for FREZJA 8)
can be replaced with a black magnetic lock for non-rebated door leaves
magnetic stop (buffer) <sup>4)</sup> <b>NEW</b> (available in six colours p. 132)
factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>5)</sup> , pages 120 to 127 <b>NEW</b>







DEBECJA1





DEBECJA 2



DEBECJA 3






DEBECJA 4



DEBECJA 7



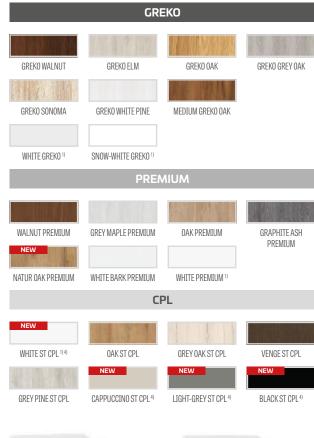





MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
   very wide crossbar
- optionally, against an additional charge, upper panels extending the frame - page 134


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# **AVAILABLE DOOR LEAF WIDTHS**



# **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket <sup>2)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 





NEMEZJA1





NEMEZJA 6





NEMEZJA 7







NEMEZJA 9

NEMEZJA 10

NEMEZJA 11

NEMEZJA 12

NEMEZJA 13

40









MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- bevelled 16 mm thick HDF panels with a selection of GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame page 134 **NEW**


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



#### **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127









BERBERYS1





**BERBERYS 2** 



**BERBERYS** 6



BERBERYS 3





BERBERYS 7



BERBERYS 4




**BERBERYS 5** 









without the AntiFinger coating

MDF stile for the GREKO and CPL laminates with the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- brushed aluminium insert profiles
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 









FLOKS1





FLOKS 2





FLOKS 3





FLOKS 4




FLOKS 5

FLOKS 6

FLOKS 7



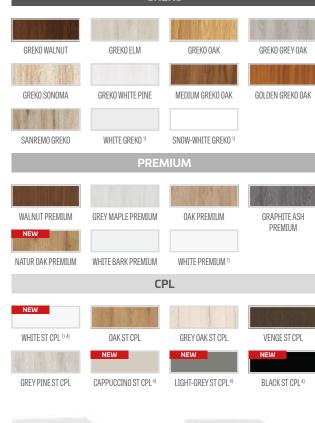

GREKO





MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- brushed aluminium insert profiles
- optionally, against an additional charge, upper panels extending the frame page 134 **NEW**


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, **NEW** plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 







KROKUS1





KROKUS 2





KROKUS 3




KROKUS 4

KROKUS 5

KROKUS 6



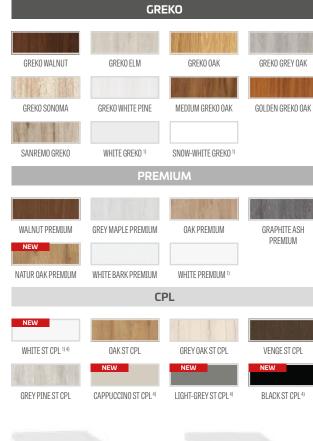



Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

with the AntiFinger coating **NEW** 

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- brushed aluminium insert profiles
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 





KAMELIA 1, laminate GRAPHITE PREMIUM ASH, brushed chrome CUBE handle, matt



KAMELIA1





KAMELIA 2





KAMELIA 3





KAMELIA 4



KAMELIA 5

KAMELIA 6

KAMELIA 7



GREKO GREKO WALNUT GREKO ELM GRFK0 OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) PREMIUM WALNUT PREMIUM **GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH** PRFMILIM NATUR OAK PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) CPL WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPL VENGE ST CPL GREY PINE ST CPL CAPPUCCINO ST CPL<sup>4)</sup> LIGHT-GREY ST CPL<sup>4)</sup> BLACK ST CPL<sup>4)</sup>

MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW


# HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket <sup>2)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints







PETUNIA1





PETUNIA 2





PETUNIA 3







PETUNIA 4



PETUNIA 5

PETUNIA 6

PETUNIA 8



GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) PREMIUM WALNUT PREMIUM **GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH** PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL NEW WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPI VENGE ST CPI NEW NEW GREY PINE ST CPL CAPPUCCINO ST CPL<sup>4)</sup> LIGHT-GREY ST CPL<sup>4)</sup> BLACK ST CPL<sup>4)</sup>

GREKO





MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket <sup>2)</sup>


can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 





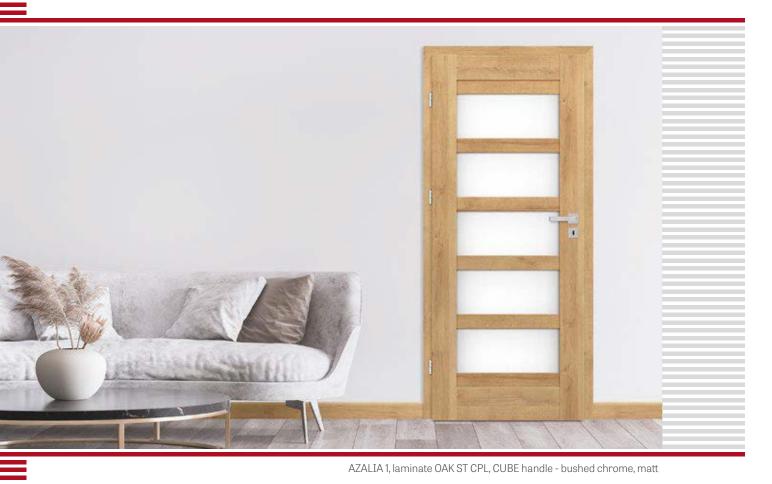



AZALIA1





AZALIA 2





AZALIA 3





AZALIA 4



AZALIA 7

AZALIA 8


52

AZALIA 5

AZALIA 6







Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

 $^{\scriptscriptstyle 3)}$  applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# **ADDITIONAL CHARGES**

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer <sup>3)</sup>, pages 120 to 127 **NEW** 









HIACYNT1

















54

HIACYNT 5

HIACYNT 6


HIACYNT 7



HIACYNT 4





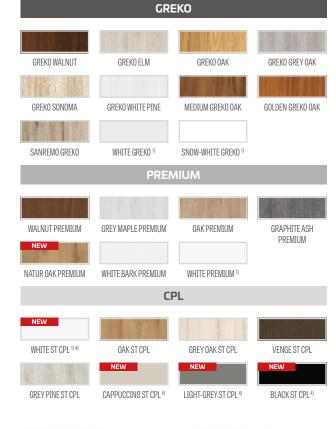





MDF stile for the GREKO and CPL laminates with the AntiFinger coating **NEW** 

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> applies only to the PREMIUM and ST CPL decors

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints

# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 22mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


# HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

# GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

# AVAILABLE SOLUTIONS (pp. 135-143)



# **AVAILABLE DOOR LEAF WIDTHS**

60 70 80 90 100	
-----------------	--

# **ADDITIONAL CHARGES**


ventilation cut
plastic woodgrain sleeves (4 pcs)
round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black
ventilation grille (only for door leaf widths of 80, 90, 100)
"100" rebated and non-rebated door leaf
frosted VSG 221 laminated safety glass, plain on both sides
metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)
drop-down gasket <sup>2)</sup>
can be replaced with a black magnetic lock for non-rebated door leaves
magnetic stop (buffer) <sup>2)</sup> <b>NEW</b>

(available in six colours p. 132)

factory-drilled openings for through-mounting applies to double section handles in our offer <sup>3)</sup>, pages 120 to 127





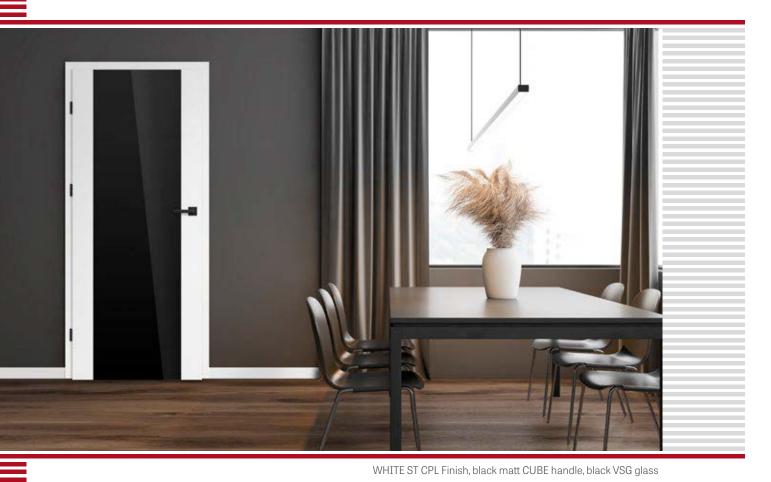



FRAGI1





FRAGI 4 DECORMAT



FRAGI 10



FRAGI 5 TRANSPARENT



Frosted VSG/ESG



FRAGI 7 DECORMAT GRAFIT



FRAGI 16 Black VSG/ESG

FRAGI 9

56

FRAGI 15



	GRE	EKO	
Market Diffe		10.1152/168	18 18 31
GREKO WALNUT	GREKO ELM	GREKO OAK	GREKO GREY OAK
		WE AT NO	
GREKO SONOMA	GREKO WHITE PINE	MEDIUM GREKO OAK	GOLDEN GREKO OAK
SANREMO GREKO	WHITE GREKO 1)	SNOW-WHITE GREKO 1)	
	PREN	MUM	
WALNUT PREMIUM	GREY MAPLE PREMIUM	OAK PREMIUM	GRAPHITE ASH PREMIUM
NEW			TILINION
NATUR OAK PREMIUM	WHITE BARK PREMIUM	WHITE PREMIUM 1)	
	CF	PL	
NEW			
WHITE ST CPL 1) 3)	OAK ST CPL	GREY OAK ST CPL	VENGE ST CPL
	NEW	NEW	NEW
GREY PINE ST CPL	CAPPUCCINO ST CPL <sup>3)</sup>	LIGHT-GREY ST CPL <sup>3)</sup>	BLACK ST CPL 3)
1000		-	
MDE atila fan tha CREKO an		Clulars wood at	ile fon the
MDF stile for the GREKO and CPL laminates with the AntiFinger coating <b>NEW</b> Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating			

<sup>1)</sup> plain white laminate imitating a painted surface <sup>2)</sup> applies only to the PREMIUM and ST CPL decors <sup>3)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### CONSTRUCTION

- rebated door leaf made in STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- a deadbolt lock, euro profile cylinder, economy lock or with a thumb turn

#### **GLAZING**

- · 8 mm tempered or tempered and VSG/ESG 441 laminated safety glass, frosted or black **NEW**, plain on both sides (for Fragi 15 & Fragi 16 models)
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### AVAILABLE SOLUTIONS (pp. 144-146)



#### **AVAILABLE DOOR LEAF WIDTHS**



#### **ADDITIONAL CHARGES**

ventilation cut

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)


factory-drilled openings for through-mounting applies to double-section handles in our offer 2), pages 120 to 127

magnetic stop (buffer) NEW (available in six colours p. 132)


#### Note:

The picture shows only an 80cm-wide door leaf. The proportion in the picture differ slightly for the other FRAGI 1 model widths. For further details and photos go to our website: www.erkado.pl

#### STANDARD "OBVERSE" GLAZING



# **"REVERSE" GLAZING MADE TO ORDER**



**G** Plain side; **M** ornamented matt side;

57



# **GRAF GLASS DOORS**

INTERIOR GLASS DOORS





NEW





**GRAF 8 DECORMAT** 



**GRAF 9 TRANSPARENT** 







GRAF 17



GRAF 26 DARK GREY



GRAF 32







GRAF 38

GLAZING TRANSLUCENCY ILLUSTRATION on p. 133



#### CONSTRUCTION

- 8 mm tempered glass, 8 mm tinted glass (GRAF 26)
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- frosted glass with black or white painted decorative patterns
  the line width (thickness) of the GRAF 1, 6, 17, 35, 36, 38 models is 30 mm
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

#### **FIXED AND ADJUSTABLE FRAMES**

- for prices of fixed and adjustable frames for rebated doors go to pp. 161-163
- no electric strike possible
- 10 mm pin hinge for glass panes frames
- ONLY REBATED FRAMES IN ALL AVAILABLE
   DECORS, STEEL FRAMES AND THE WHITE PAINTED TITANIUM
   UV FRAME ARE AVAILABLE FOR GLASS GRAF DOORS

NOTE: For the extended Glass Door Collection and a variety of available models go to our website: www.erkado.pl. You can also order the available models through the B2B panel.

See more at www.erkado.pl




# **AVAILABLE DOOR LEAF WIDTHS**

) 70 80 90 (charged extra

#### **ADDITIONAL CHARGES**

"90" door leaf

ventilation cut

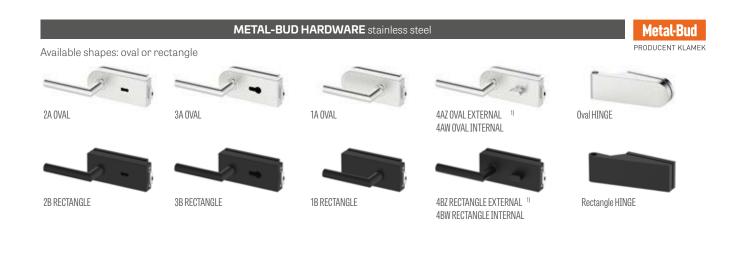

Presented model: GRAF 36 with WHITE CPL laminate

# DECORATIVE PANELS

WALL-MOUNTED



Decorative panel: decorative strip OAK STC PL, adapter BLACK ST CPL, skirting board OAK ST CPL, door BALDUR 3 OAK ST CPL, black VSG glass

Decorative panels are mounted on the wall as a decorative element and at the same time improve the acoustics in the room.

Mounting is possible in several ways - the decorative skirting board can be mounted to the wall by means of a mounting strip only or with the use of adapters which constitute a base for the panels.

Decorative panels are available in the PREMIUM and ST CPL laminates, which can be put together in combinations of your choice.





composition of decorative panels with the skirting board OAK ST CPL



components of the decorative panel

# NEW

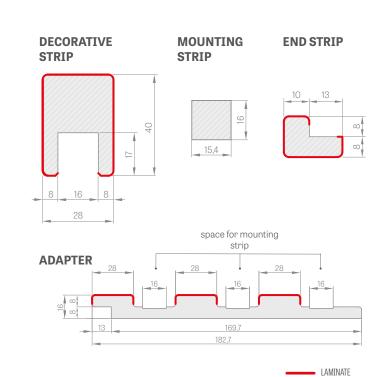

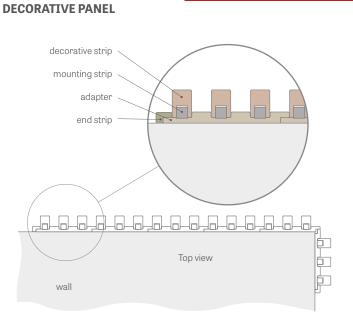


adapter, length 2750 mm
decorative strip + mounting strip length 2750 mm
end strip, length 2750 mm

The individual elements of the decorative panel system are commercially available in a length of 2750 mm, however each product has a production length of 28 00 mmm and is delivered in this length, where 25 mm per side is a margin for free trimming before installation and also a reserve in case of transport damage.

The wall panels can also be mounted without an adapter directly to the wall using only a mounting strip on which we mount the decorative strip.

adapter - quantity in pack 1 piece end strip - package quantity 1 piece decorative strip + mounting strip - pack of 3 sets

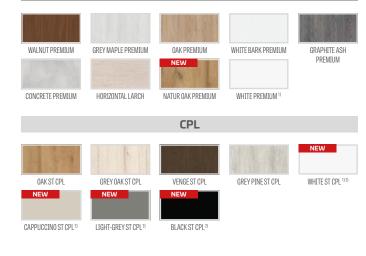

PREMIUN

# **SKIRTING BOARDS**


# **SKIRTING BOARD**

- · length: 2.40 running metres.
- the skirting board is made of moisture resistant MDF board. Available variants: WHITE TITANIUM UV paint, laminates: GREKO, ST CPL, PREMIUM and in base laminate to be paint coated.
- fitting method: bonding to wall





REBATED, NON-REBATED AND REVERSE PAINTED DOORS

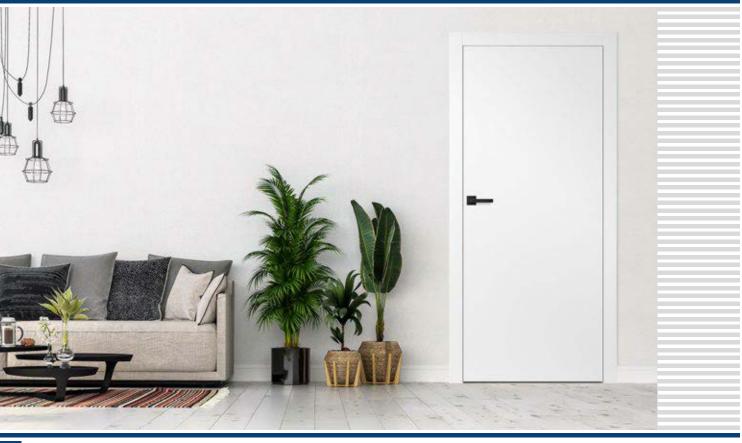

Presented model: UNO PREMIUM with black matt CUBE handle






# PAINTED

WHITE TITANIUM UV

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

#### FINISHING

- door leaves and door frames coated with water-based UV hardened
   varnish for high resistance to adverse use conditions
- · door leaf edge made in standard technology

#### HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock NEW

#### **ADDITIONAL CHARGES**

#### reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm )

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) <sup>1)</sup> **NEW** (available in six colours p. 132)

stainless steel porthole: "chrome" polished or "satine" brushed; frosted decormat glass, non-tinted glass; porthole ID 235 mm; external 350 mm)





REBATED, NON-REBATED PAINTED DOORS











NEW

TURAN 6





TURAN 7\*)





TURAN 4




Presented model: TURAN 5 with black matt CUBE handle

PAINTED

WHITE TITANIUM UV

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 16 mm thick HDF panels, moulded and coated with UV resistant varnish
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

#### FINISHING

• door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- TURAN 1 model, 4 mm tempered glass or, against an additional charge, frosted or black VSG441 laminated safety \_\_\_\_\_\_ glass, plain on both sides
- TURAN 7 model available with a mirror on one side. Other side varnished board WHITE TITANIUM UV. Obverse mirror on the hinge side.

# MOULDING



# **ADDITIONAL CHARGES**

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

frosted or black VSG 221 laminated safety glass, **NEW** plain on both sides (for TURAN 1)

#### drop-down gasket<sup>1)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 **NEW** 

<sup>1)</sup> the stop prevents application of a drop-down gasket and vice versa



REBATED, NON-REBATED PAINTED DOORS



MISKANT 2, BELLA slim black matt handle



MISKANT1



MISKANT 4



MISKANT 2



MISKANT 3




MISKANT 6



# PAINTED

WHITE TITANIUM UV

# AVAILABLE SOLUTIONS (pp. 135-143)



# **AVAILABLE DOOR LEAF WIDTHS**



# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 16 mm thick HDF panels, moulded and coated with UV resistant varnish
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

#### FINISHING

 door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- toughened transparent or frosted glass with a thickness of 4 mm
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- black lines of 18 mm in width (thickness)

#### STANDARD "OBVERSE" GLAZING



#### **"REVERSE" GLAZING MADE TO ORDER**



# **ADDITIONAL CHARGES**

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket<sup>1)</sup>

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 **NEW** 





NEMEZJA1





NEMEZJA 4



NEMEZJA 6





NEMEZJA 7







NEMEZJA 9

NEMEZJA 10

NEMEZJA 11

NEMEZJA 12

NEMEZJA 13






# PAINTED

WHITE TITANIUM UV

# AVAILABLE SOLUTIONS (pp. 135-143)



# AVAILABLE DOOR LEAF WIDTHS



# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 16 mm thick HDF panels, moulded and coated with UV resistant varnish
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

#### FINISHING

 door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- frosted or transparent tempered glass as standard, and custom-made frosted VSG 221 laminated safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### **ADDITIONAL CHARGES**

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

frosted VSG 221 laminated safety glass, plain on both sides

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 **NEW** 







LAURENCJA1



LAURENCJA 3





LAURENCJA 5


LAURENCJA 6



# PAINTED

WHITE TITANIUM UV

# AVAILABLE SOLUTIONS (pp. 135-143)



#### **AVAILABLE DOOR LEAF WIDTHS**



# CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 4 mm thick HDF panels, moulded and coated with UVresistant varnish
  optionally, against an additional charge, upper panels extending the
- frame page 134 NEW

#### FINISHING

door leaves and door frames coated with water-based UV hardened
 varnish for high resistance to adverse use conditions

#### HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

#### GLAZING

- frosted or transparent tempered glass as a standard, and custommade frosted or black VSG 221 laminated safety glass NEW against an additional charge, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### **ADDITIONAL CHARGES**

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

frosted or black VSG 221 laminated safety glass, **NEW** plain on both sides

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 **NEW** 

<sup>1)</sup> the stop prevents application of a drop-down gasket and vice versa



produkt rekomendowany do konkursu



REBATED, NON-REBATED AND REVERSE PAINTED DOORS



MILDA 4, CUBE PREMIUM handle, black






## PAINTED

WHITE TITANIUM UV

## AVAILABLE SOLUTIONS (pp. 135-143)



## AVAILABLE DOOR LEAF WIDTHS



### CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

#### FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- door leaf edge made in standard or non-rebated technology

#### HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock **NEW**

#### MOULDING



#### ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm )

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

<sup>1)</sup> the stop prevents application of a drop-down gasket and vice versa











## PAINTED


WHITE TITANIUM UV

## AVAILABLE SOLUTIONS 1)3) (pp. 135-143)





## AVAILABLE DOOR LEAF WIDTHS



MOULDING

VSG/ESG laminated and tempered glass as a standard, frosted or black **NEW** 

### CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

#### FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- · door leaf edge made in standard or non-rebated technology
- the BALDUR1 sliding systems have a 17 mm high aluminium or black coloured profile in the lower part of the glass pane

#### HARDWARE

- three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock **NEW**

#### GLAZING

- BALDUR 1, 3, 5: SG/ESG 441 laminated and tempered safetyglass as a standard, frosted or black, plain on both sides
   NEW
- fixed glazing widths: BALDUR 1 50 mm, BALDUR 3, 5 210 mm

#### **ADDITIONAL CHARGES**

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom bar to enable the customer to shorten the leaf by themselves drop-down gasket (not for the BALDUR 1, 3, 5 models)


metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket<sup>2)</sup> (not for the BALDUR 1, 3, 5 models)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer)<sup>2)</sup> **NEW** (available in six colours p. 132)

#### **VENTILATION CUT**



<sup>1)</sup> the BALDUR 1, 3, 5 models are not available with sliding systems or double-leaf doors <sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa <sup>3)</sup> the BALDUR 1 model is not available with pocket systems





ANUBIS 2, handle: BELLA slim, shiny barass






## PAINTED

WHITE TITANIUM UV

## AVAILABLE SOLUTIONS (pp. 135-143)



## AVAILABLE DOOR LEAF WIDTHS



### CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- door leaf edge made in standard or non-rebated technology

#### HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock **NEW**

#### MOULDING



#### **ADDITIONAL CHARGES**

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm )

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

<sup>1)</sup> the stop prevents application of a drop-down gasket and vice versa





SYLENA 2, CUBE handle, black, matt



SYLENA 5

78



### PAINTED

WHITE TITANIUM UV

## AVAILABLE SOLUTIONS (pp. 135-143)



## AVAILABLE DOOR LEAF WIDTHS



### CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW


#### FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- door leaf edge made in standard or non-rebated technology

#### HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock **NEW**

#### MOULDING



#### **ADDITIONAL CHARGES**

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm )

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

<sup>1)</sup> the stop prevents application of a drop-down gasket and vice versa





DECORATIVE INSERT FLUSH WITH THE LAMINATE SURFACE

## LUX INLAY OAK









inlay LUX 304



inlay LUX 316

LUX INLAY **BLACK** 



inlay LUX 213





inlay LUX204



inlay LUX 203



inlay **LUX216** 

LUX INLAY BRUSHED STEEL







inlay LUX 112



inlay LUX 104





inlay LUX 103



inlay LUX 116

# NEW







**INLAYS** are located on both sides of the leaf and are The inlay width is 8 mm and 220 mm (LUX 315 inlay). Available colours of the LUX INLAY: brushed steel, black, oak (compatible with OAK The presented INLAYS can be optionally used in the following models against an additional charge: UNO PREMIUM laminate





UNO PREMIUM inlay 313, door-leaf with WHITE PREMIUM laminate, door-frame laminate OAK CPL, LUNA PREMIUM handle round, black matt






Presented model: UNO PREMIUM with WALNUT PREMIUM laminate and a CUBE handle



## 

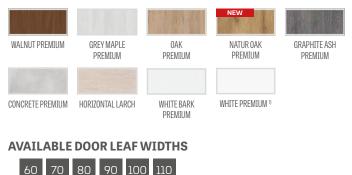



## **EDGE FINISH TYPES**





BLACK PLAIN DOOR LEAF EDGE FINISH (charged extra)





### CONSTRUCTION

- rebated, non-rebated or reverse door leaf .
- . internal timber stile (sides and top, bottom -MDF) covered
- with two HDF boards
- stabilizing "honeycomb" filling
- solid core filling, against an additional charge .
- optionally, against an additional charge, upper panels extending the frame page 134


### FINISHING

- · HDF board with PREMIUM laminate
- door leaf edge made in standard rebated or non-rebated technology .
- the edge laminated in the same colour as the door leaf surface or, optionally, in plain black (the decor options include transverse larch with a black edge with a horizontal structure)
- inserts (inlay) colour: brushed steel, black and OAK CPL with a width of 8 mm or 200 mm (LUX inlay315) flush with the leaf, on both sides of the leaf

#### HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- bolt lock in the rebate leaf and a magnetic lock in thenon-rebate and reverse leaf: with a key, . thumb turn cylinder, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock NEW

#### AVAILABLE SOLUTIONS (pp. 135-143)



### **ADDITIONAL CHARGES**

solid core filling	
door closer reinforce	ment
arm door closer (silve	er, black, white, brown)
additional bottom bar	(can be cut by customer up to max8 cm )
round and square me brushed nickel or pat	tal sleeves (4 pcs); ina finish, white and black
plastic woodgrain sle	eves (4 pcs)
ventilation door cut o	r grille
'100" rebated and nor	n-rebated door leaf
'110" rebated and nor	i-rebated door leaf
drop-down gasket <sup>2)</sup>	
metal hinge casings ir polished brass, white	n the rebated door leaf (brushed nickel, patina, polished chrome, and black)
	le: "chrome" polished or "satine" brushed; frosted decormat glass, hole ID 235 mm external 350 mm)
black door leaf edge fi	nish

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer)<sup>2)</sup> NEW (available in six colours p. 132)

#### LUX inlay; available versions p. 80-81

<sup>1)</sup> plain white laminate imitating a painted surface <sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa





BALDUR 1, leaf laminate BLACK ST CPL, frame laminate OAK NATUR PREMIUM, handle BELLA brass glossy






BALDUR1



BALDUR 3, leaf laminate BLACK ST CPL, frame laminate OAK NATUR PREMIUM, handle BELLA brass glossy

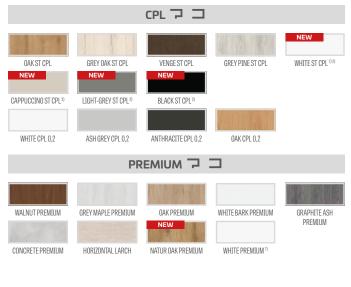

### AVAILABLE SOLUTIONS 3) (pp. 135-143)







## **EDGE FINISH TYPES**







BLACK HORIZONTAL DOOR LEAF EDGE FINISH

#### CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge .
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

### **FINISHING**

- · HDF board in PREMIUM or CPL laminate
- leaf edge made in the standard rebated or non-rebated technology with CPL 0.2 laminates. laminated with the ABS edging, and in the same colour as the leaf only or, against an additional charge, with a standard black edge
- reverse door leaf only in with the STANDARD edge and with the GREKO, PREMIUM and ST CPL decors
- The edge laminated in the same colour as the door leaf surface or, optionally, in plain black (transverse larch, black edge with a transverse structure) black, partial edge finish (two vertical and a top one) and by the glass.
- door-leaf BALDUR 1 rebated and non-rebated only for the WHITE ST CPL decor made optionally in the soft technology (no visible longitudinal laminate joints)
- the BALDUR 1 sliding systems have a 17 mm high aluminium or black coloured profile in the lower part of the glass pane NEW

### HARDWARE

- two pin mortise hinges or three hinges (PREMIUM finish) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

#### **GLAZING**

BALDUR 1, 3: 8 mm tempered frosted glass or VSG/ESG 441 safety glass, frosted or black NEW , plain on both sides

### **AVAILABLE DOOR LEAF WIDTHS**



#### **ADDITIONAL CHARGES**

#### reverse door leaf NEW

(not available with CPL 0.2 finishing and for Baldur 1 with 'SOFT' edge)

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core board, GREKO & PREMIUM decors and the "100" leaf)

frosted or black VSG/ESG 441 glazing

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish **NEW** 

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) NEW

(available in six colours p. 132)

## **VENTILATION CUT**



<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints

<sup>3)</sup> the BALDUR 3 model not available in sliding systems or double-leaf doors

<sup>4)</sup> only BALDUR 1 rebated and non-rebated in WHITE ST CPL laminate







Presented model: BALDUR 3 with WHITEST CPL laminate and a CUBE handle





BALDUR 1, LIGHT-GREY ST CPL laminate, TOPAZ INOX handle





87







ALTAMURA 1



ALTAMURA 5





ALTAMURA 3



ALTAMURA 4



NEW





grille panel



ALTAMURA 8

Bottom panel

88

ALTAMURA 6

#### CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and PREMIUM laminate
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

### FINISHING

- laminated HDF board
- door leaf edge made in the SOFT (FINISH & GREKO) or the STANDARD (FINISH, GREKO, PREMIUM & CPL) technology
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- reverse door leaf only in the STANDARD edge and in GREKO, PRÉMIUM and ST CPL decors
   edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)
- for ALTAMURA 1 double-sided inlays available against an additional charge, as shown on pages 80-81

#### HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver
   (here) a start as a three of the second start and the second start as a start as the second start as a start as the second s
- (black against an extra charge); hinges are supplied and priced with the door frame
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reversedoor leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock NEW

#### GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

### **ADDITIONAL CHARGES**

reverse door leaf NEW (unavailable for CPL 0,2 and 0,7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown) additional bottom bar (can be cut by customer up to max 8 cm)

ventilation door cut or grille

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

#### plastic sleeves

rebated and non-rebated leaf "100" rebated and non-rebated leaf "110" solid core filling (price includes a third hinge used in the rebated door leaf as standard)

#### frosted VSG 221 laminated glass

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)

#### drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

ALTAMURA 1: stainless steel porthole: polished "chrome" or brushed "satin" and black matt; frosted decormat glass, non-tinted glass; portholedimeter: internal: 235 mm; external 350 mm)

#### external 350 mm

stainless steel panel (fitted on both sides in the rebated STANDARD door leaves only), height 300 mm


#### black door leaf edge finish NEW

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) <sup>3)</sup> **NEW** 

(available in six colours p. 132)

ALTAMURA 1 model: LUX inlay; available versions p. 80-81

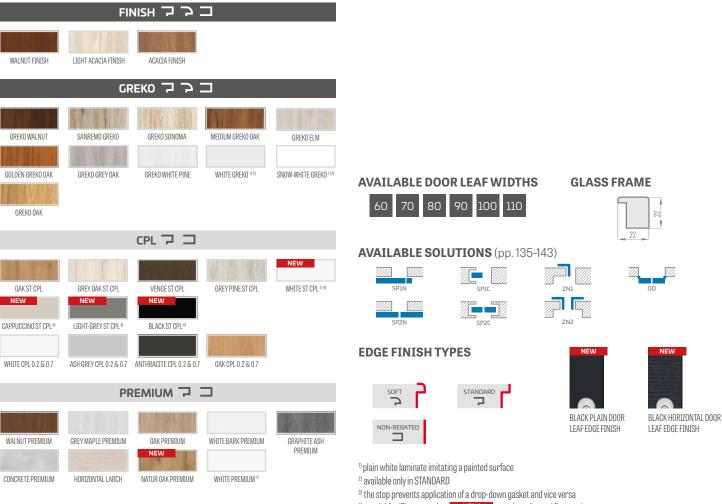

<sup>4)</sup> special AntiFinger coating **NEW** to reduce dirt and fingerprints







ANSEDONIA1



ANSEDONIA 2



ANSEDONIA 3









ANSEDONIA 5





ANSEDONIA 6



ANSEDONIA 7

ANSEDONIA 8

ANSEDONIA 9

ANSEDONIA 10

ANSEDONIA 11

ANSEDONIA 12

GREY OAK ST CPL laminate, TOPAZ INOX handle

#### CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates .
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and **PREMIUM** laminate
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

## FINISHING

- laminated HDF board
- door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the . same colour as the door leaf only or, against an additional charge, with a standard black edge
- reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

#### HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- bolt lock in the rebated leaf and magnetic lock in thenon-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock

#### GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

### **ADDITIONAL CHARGES**

#### reverse door leaf NEW (not available in CPL 0.2 & 0.7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max8 cm )

ventilation door cut or grille

plastic sleeves

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass, plain on both sides

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)


#### drop-down gasket <sup>3)</sup>

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish **NEW** 

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) <sup>3)</sup> NEW (available in six colours p. 132)

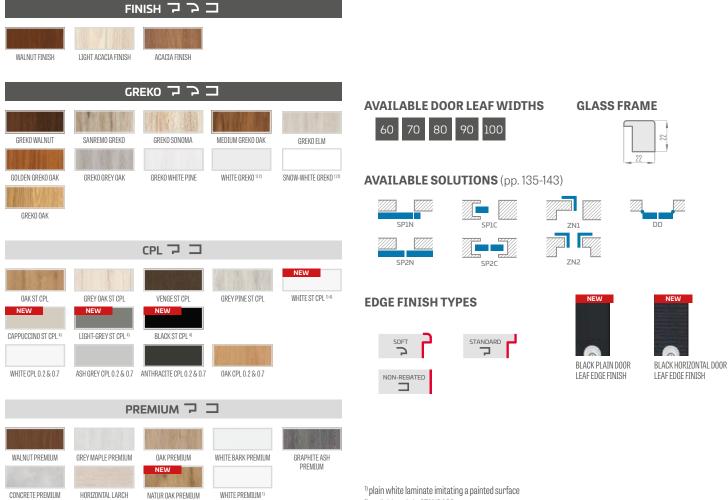

2) available only in STANDARD

<sup>3)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>4)</sup> special AntiFinger coating **NEW** to reduce dirt and fingerprints







LORIENT 1



LORIENT 7



LORIENT 2





LORIENT 3

















LORIENT 6



LORIENT 12

LORIENT 8

LORIENT 9

LORIENT 10

LORIENT 11

92

#### CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and PREMIUM laminate
- · honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134
   NEW

### FINISHING

- laminated HDF board
- door leaf edge made in the SOFT or STANDARD technology.
- reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
   edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

#### HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- bolt lock in the rebated leaf and magnetic lock in thenon-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock

#### GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

#### **ADDITIONAL CHARGES**

### reverse door leaf NEW

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max 8 cm)

ventilation door cut or grille

#### plastic sleeves

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass, plain on both sides

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)


#### drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

#### black door leaf edge finish **NEW**

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) <sup>3)</sup> **NEW** (available in six colours p. 132)

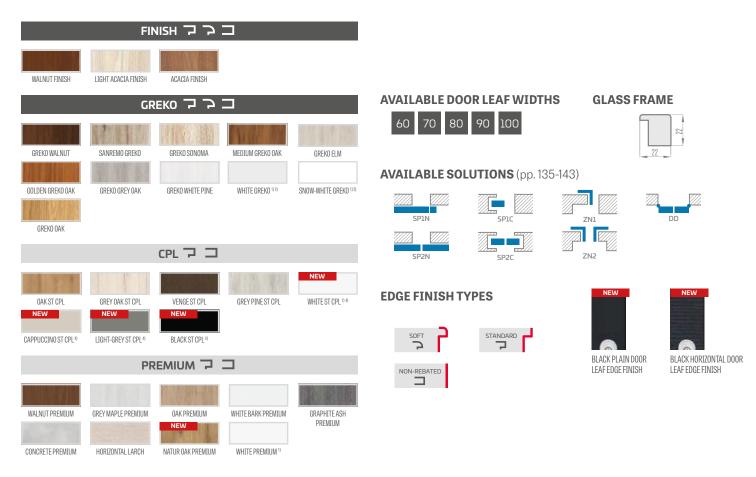

<sup>1)</sup> plain white laminate imitating a painted surface

2) available only in STANDARD

<sup>3)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>4)</sup> special AntiFinger coating **NEW** to reduce dirt and fingerprints







MENTON 1



MENTON 7



MENTON 2





MENTON 3









MENTON 5







MENTON 12

MENTON 8

MENTON 9

MENTON 11

MENTON 6



94



MENTON 10

#### CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates . internal timber stile (sides and top, bottom -MDF) covered
- with two HDF boards in CPL and PREMIUM laminate
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

### FINISHING

- door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

#### HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf.
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- bolt lock in the rebated leaf and magnetic lock in thenon-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock

### GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

### **ADDITIONAL CHARGES**

## reverse door leaf NEW

(Not available in CPL 0.2 & 0.7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max 8 cm)

ventilation door cut or grille

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

#### plastic sleeves

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)


#### drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish **NEW** 

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) <sup>3)</sup> NEW (available in six colours p. 132)

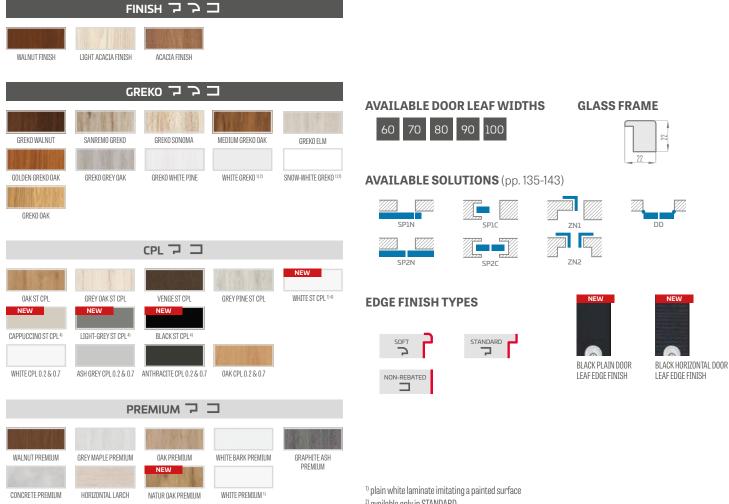


2) available only in STANDARD

 $^{\scriptscriptstyle 3)}$  the stop prevents application of a drop-down gasket and vice versa

<sup>4)</sup> special AntiFinger coating **NEW** to reduce dirt and fingerprints



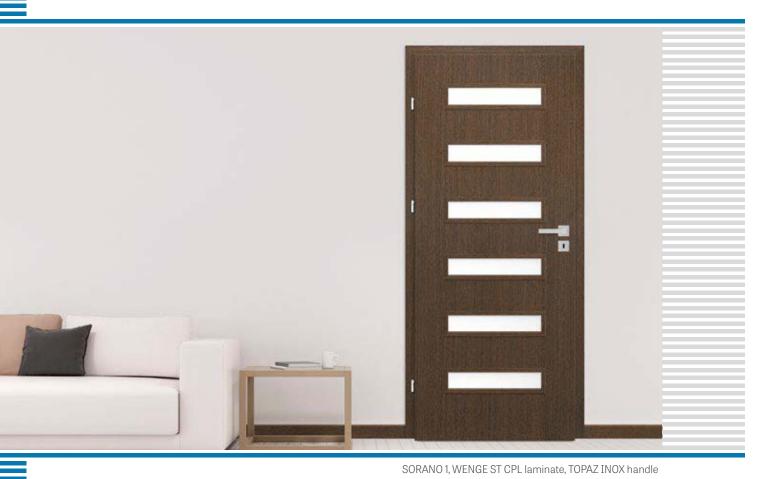

SORANO1





SORANO 2





SORANO 3













SORANO 6



SORANO 7

SORANO 8

SORANO 9

SORANO 10

SORANO 11

SORANO 12

96

#### CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
   internal timber stile (sides and top, bottom -MDF) covered
- with two HDF boards in the CPL & PREMIUM laminate
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

### FINISHING

- · door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
   reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

#### HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame NEW
- bolt lock in the rebated leaf and magnetic lock in thenon-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock NEW

### GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

### **ADDITIONAL CHARGES**

#### reverse door leaf NEW (not available in CPL 0.2 & 0.7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max8 cm )

ventilation door cut or grille

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

#### plastic sleeves

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)


#### drop-down gasket <sup>3)</sup>

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish NEW

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) <sup>3)</sup> **NEW** (available in six colours p. 132)

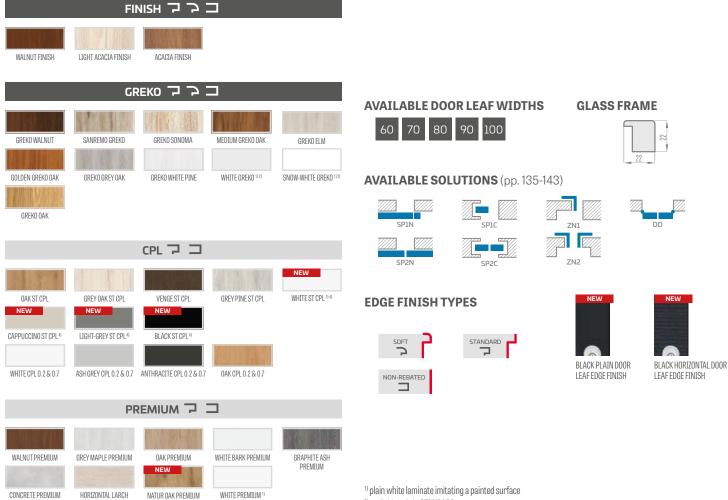


<sup>2)</sup> available only in STANDARD

<sup>3)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>4)</sup> special AntiFinger coating **NEW** to reduce dirt and fingerprints



OPENING INWARDS/OUTWARDS RC2 & RC3 BURGLARPROOF REBATED DOORS

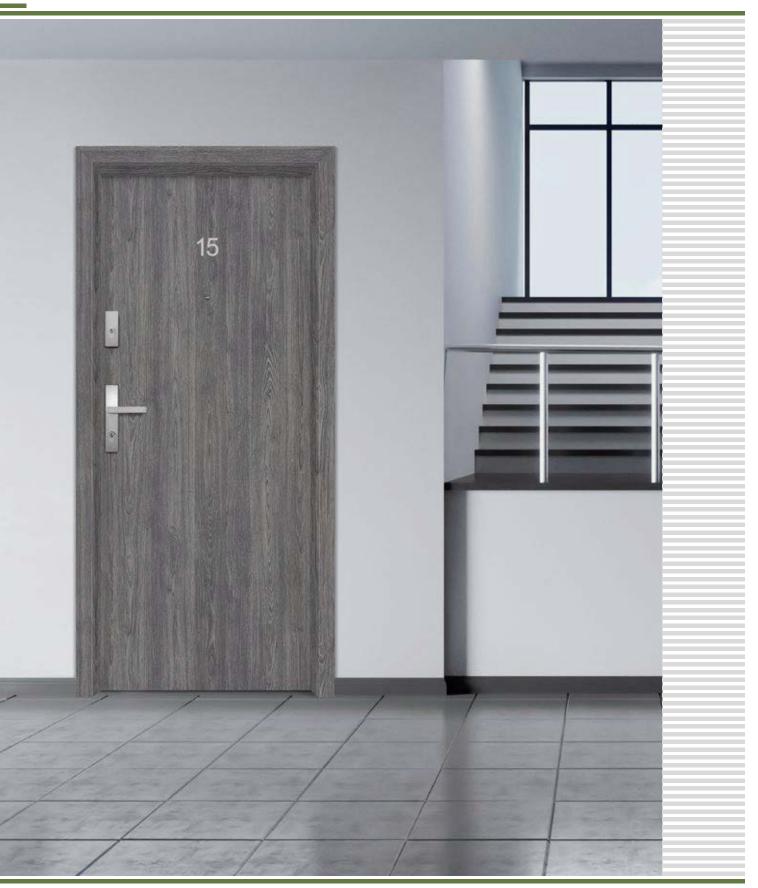

FORTECA RC 3, laminate: GRAPHITE ASH PREMIUM





2 HOOK BOLTS



UPPER AND LOWER SECURITY LOCKS



FOUR DOOR STRIKER PLATES Adjustable



DOOR LEAF 46 mm Steel sheet reinforced



FORTECA RC2




MULTIPOINT LOCK




FORTECA RC3



DOOR VIEWER



STAINLESS STEEL SHEET TRESHOLD





FOUR 2-PIN HINGES;  $\varnothing$ 16, 3D ADJUSTABLE



4 HINGE BOLTS



FIXED DOOR FRAME Timber frame in RC2; Reinforced frame in RC3




HARDWOOD TRESHOLD (lacquer)



STAINLESS STEEL TRESHOLD

20

FORTECA DOOR LEAF CROSS-SECTION







OPENING INWARDS/OUTWARDS RC2 & RC3 BURGLARPROOF REBATED DOORS





FORTECA RC2, laminate NATUR OAK PREMIUM, handle black matt

F	ORTECA RC 2	
GOLD PACKAGE	SILVER PACKAGE	DOOR LEAF

#### RC2 – Important:

For compliance with RC2 burglary resistance class as per the PN-EN 1627:2012, Min Class 2 as per PN-EN 1906:2012 – for handles and door face plates
 Min Class 4 and 1 as per PN-EN 1303:2015 – for lock cylinders

F	ORTECA RC 3 NEW	
GOLD PACKAGE	SILVER PACKAGE	DOOR LEAF

#### RC3 - Important:

For compliance with RC3 burglary resistance class as per PN-EN 1627:2012, the

Min Class 3 as per PN-EN 1906:2012 – for handles and door face plates
 Min Class 4 and 1 as per PN-EN 1303:2015 – for lock cylinders

### **GENRAL INFORMATION**

- the FORTECA inwards/outwards opening burglar-proof doors are rated for sound insulation at Rw=38 Db, have a burglary resistance class of RC2 OR RC3 as per PN EN 1627:2012 and class 5 for mechanical durability.
- available in the GOLD and SILVER packages with optional installation kit and steel door frame.
- · designed to be used as an internal front door.

#### CONSTRUCTION

- timber stile covered with glulam HDF boards
- specially designed solid core filling
- whole door leaf reinforced with a steel panel
- door leaf thickness of 46 mm

#### FINISHING

- leaf edge made in the STANDARD technology (with CPL 0.2 & 0.7 laminates, with the ABS edging in the same colour as the leaf only or with a standard black edge against an additional charge)
- 8 mm or 220 mm wide black brushed steel or OAK CPL inserts (inlays) flush with the door leaf, on both sides of the leaf NEW
- the edge laminated in the same colour as the door leaf or, optionally plain black (transverse larch, black edge with a transverse structure) NEW
- HDF board covered with the FINISH, GREKO or PREMIUM laminate
- side and top panels glued to the wall (only with a masonry wall installed door frame and an 8 cm clip-on square) made to order for additional charge - page 134 NEW

#### HARDWARE

- four silver 2-pin hinges; Ø16; 3D adjustable (2D with steel frame)
- · four-point security hook bolt lock as standard for two lock cores
- four-hinge bolts on the hinge side
- possibility to apply an arm door closer
- lower lock PZ centre is 92 mm

#### FIXED REBATED DOOR FRAME

- fixed timber door frame covered with MDF boards; Internally reinforced with a steel square on the door striker plates side for FORTECA RC3
- installation in the range of 90-450 mm every 40 mm
- adjustable main grip in the door frame and two adjustable grips for the bolt hook and additional lock

#### **GOLD PACKAGE**

 the GOLD PACKAGE FORTECA doors are complete with a steel or timber threshold, with a multipoint lock, and pre-drilled holes for a security handle and upper face plate. They come with a door viewer (hole to be drilled by the customer) and certified security handles and lock cores.

#### SILVER PACKAGE NEW

 the SILVER PACKAGE FORTECA doors are complete witha steel or timber threshold, and a multipoint lock. We recommend ordering a door viewer and certified hardware from the ERKADO range or ordering the same from an external supplier keeping in mind the important note on compliance with the anti-burglary requirements (p. 100).

### **ADDITIONAL CHARGES**

"100" door

#### black door leaf edge finish

handle PZ centre of 92 mm with the top face plate for RC 2 doors, silver F9 or black (Class 2 as per the PN-EN 1906:2012 standard)

handle with lock core protection and the rosette plate for the RC3 door; F9 silver (Class 3 as per PN-EN 1906:2012)

two silver lock cores set (one with a thumbturn) in a master key system for RC2 and RC3 doors (Class  $4\,\&1\,as$  per PN-EN 1303:2015)

#### door viewer (nickel or black)

metal hinge covers (satin nickel, patina)

cutting the door with the wooden frame to 8 cm and with steel frame to 1 cm  $\,$ 

LUX inlay; available versions p. 80-81

magnetic stop (buffer) **NEW** 

(available in six colours p. 132)

arm door closer (silver, black, white, brown)

GREKO GREKO WALNUT SANREMO GREKO GREKO SONOMA MEDIUM GREKO OAK GREKO ELM GOLDEN GREKO OAK GRFKO GRFY OAK GREKO WHITE PINE WHITE GREKO<sup>1</sup> SNOW-WHITE GREKO 1 GRFK0 OAK FINISH WAI NUT FINISH LIGHT ACACIA FINISH ACACIA FINISH PREMIUM WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM WHITE BARK PREMIUM GRAPHITE ASH PRFMIUM NEW CONCRETE PREMIUM HORIZONTAL LARCH NATUR OAK PREMIUM WHITE PREMIUM 1 CPL GREY OAK ST CPL VENGE ST CPL OAK ST CPL GREY PINE ST CPI WHITE ST CPL 1) 2) NEW NEV CAPPUCCINO ST CPL<sup>2</sup> BLACK ST CPL<sup>2</sup> LIGHT-GREY ST CPL<sup>2</sup> WHITE CPI 0.2 & 0.7 ASH GREY CPL 0.2 & 0.7 ANTHRACITE CPL 0.2 & 0.7 OAK CPL 0.2 & 0.7


<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints






#### FORTECA RC3 FIXED DOOR FRAME



MASONRY WALL every 40 mm (the clip-on square not included, charged extra)

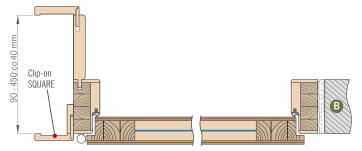

Range (mm)	
90-130 130-170	
170-210 210-250	
250-290 290-330 330-370 370-410 410-450	

The wall cladding is available with a 6 cm or 8 cm internal angle and with a choice of 6 cm or 8 cm external angle against an extra charge.

### **ADDITIONAL CHARGES**


frame joints at 90 degrees

clip-on square with 60 mm or 80 mm clips **NEW** (the clip-on square with three clips extends the adjustment range by 20 mm)

cutting the door with the wooden frame to 8 cm in 1 cm increments


side and top panels glued to the wall available (only with a wall installed door frame and an 8 cm square)

headband and quarter round

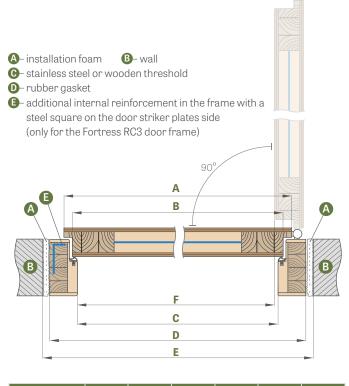


Door Width	A	В	C	D	E	F
"80N"	804	778	764	852	892	759
"80"	848	822	808	896	936	803
"90"	948	922	908	996	1036	903
"100"	1048	1022	1008	1096	1136	1003

FIXED DOOR FRAME




Clip-on SQUARE 6 cm and 8 cm with clips



16

MASKING STRIP




QUARTER ROUND





#### **ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)**

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001

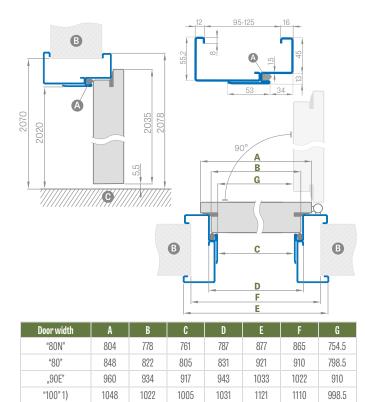


"90E" - investment width

FORTECA RC2 ADJUSTABLE STEEL DOOR FRAME
Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305
305-335
335-365

FORTECA RC3 ADJUSTABLE STEEL DOOR FRAME
Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305
305-335
335-365


### SQUARE STEEL DOOR FRAME, LARGE VERSION

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001



Door width	A	В	C	D	E	F	G
"80N"	804	778	761	787	867	840	754.5
"80"	848	822	805	831	911	885	798.5
"90E"	960	934	917	943	1023	997	910
"100" <sup>1)</sup>	1048	1022	1005	1031	1111	1085	998.5

### **FITTING THE SQUARE FRAME**



### **ADDITIONAL CHARGES**

"100" Square frame, large version

door closer reinforcement

stainless steel threshold

cutting the door with the steel frame to 6 cm in 1 cm increments

galvanised sheet steel

non-typical RAL (intensive, pearly and metallic colours not included)


				RAL				
RAL 9003 <sup>1)</sup>	RAL 9010	RAL 9016	RAL 8003	RAL 8017	RAL 7016	RAL 7022 <sup>1)</sup>	RAL 7047	RAL 1001

<sup>1)</sup> additional charge +10%



## HERSE SET AKUSTIC 39 dB

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS

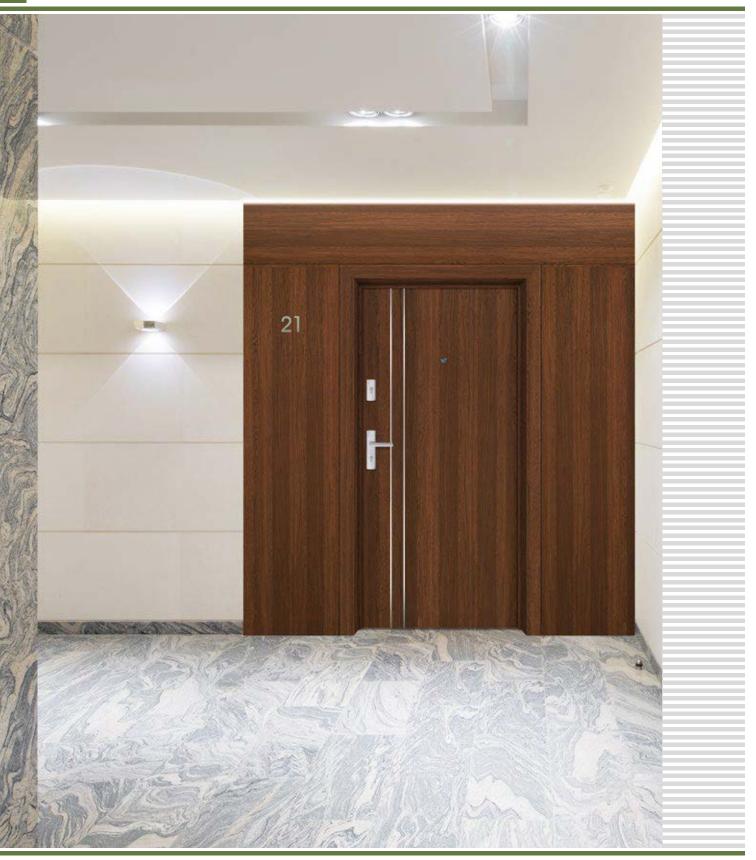

Presented model: HERSE LUX SET 4 in WALNUT GREKO finish with an ESSEN handle



UPPER SECURITY LOCK



LOWER SECURITY LOCK



ADJUSTABLE MAIN KEEPER IN FRAME



ESSEN HANDLE



LEAF 46 mm HERSE SET AKUSTIC 39 dB reinforced with sheet steel



46 mm HERSE SET 32 dB door leaf with channel reinforced



DOOR VIEWER

- G.



DROP-DOWN gasket with pressure adjustment



THREE 2-PIN HINGES; Ø16, 3D ADJUSTABLE



3 HINGE BOLTS



FIXED WOODEN DOOR FRAME




HARDWOOD TRESHOLD (lacquer)




STAINLESS STEEL TRESHOLD

HERSE DOOR LEAF CROSS-SECTION



STAINLESS STEEL SHEET TRESHOLD







## HERSE SET AKUSTIC 39 dB

NEW

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS



### **GENRAL INFORMATION**

- HERSE SET Doors are designed for housing and public utility building as an entrance internal door (excluding the "80N" width).
- the HERSE SET leaf with fixed and adjustable door frame with each of threshold available is rated for sound insulation at Rw = 32dB
- HERSE SET Doors in GOLD and SILVER Packages are fully preassembled with a threshold fitted, and pre-drilled holes for handle and face plate installation for the GOLD version.

#### CONSTRUCTION

- timber and MDF stile covered with two HDF boards
- specially designed solid core filling
- robust steel channel section reinforced
- door leaf thickness of 46 mm
- additional gasket in the door leaf

#### FINISHING

- · door leaf edge made in the SOFT or STANDARD technology
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- 8 mm or 200 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides
- the STANDARD edge laminated in the same colour as the door leaf or, optionally, plain black edging (transverse larch, black edge with a transverse structure)
- pre-cut up to 8 cm as an option
- custom order with the lower lock only as an option
- side and top panels glued to the wall (only with the adjustable door frame and an 8 cm square) - page 134 NEW

#### HARDWARE

- three silver 2-pin hinges; Ø16; 3D adjustable (2D with a steel frame)
- two 3-pin Class 2 rated security locks with a thumb turn (optionally only lower)
- three hinge bolts on the hinge side
- possibility to apply an arm door closer
- lower lock PZ centre is 72 mm
- optionally, a bolt strip lock with two cores, against an extra charge

#### **REBATED FIXED AND ADJUSTABLE DOOR FRAMES**

- optionally, an electric door strike can be used in the door frame for the lower lock with no upper lock in the door leaf.
  - adjustable main keeper in frames
  - the **80N** width is available on the fixed door frame only

### AVAILABLE DOOR LEAF WIDTHS



#### **EDGE FINISH TYPES**




GOLD PACKAGE SILVER PACKAGE

Door leaf with fixed timber door frame, stainless steel threshold and hardware  $^{\rm 4)}$  Door leaf with fixed timber door frame, stainless steel threshold, w/o hardware  $^{\rm 4)}$ 

## **ADDITIONAL CHARGES**

#### door viewer

nardwood threshold (lacquer) for adjustable frames 55 mm or stainless steel threshold with gasket
nardwood threshold (lacquer) for adjustable frames
arm door closer (silver, black, white, brown)
door closer reinforcement
drop-down gasket <sup>2)</sup>
cutting the door leaf with a wooden frame up to 8 cm every and up to 6 cm with a steel frame in the CZ standard
plack door leaf edge finish
100" Door leaf or package
30/45 lock core
30G/45 or 30/45G cylinder-holder
30/45 lock core and 30G/45 or 30/45G cylinder-holder in the master key system
netal covers of the hinge (satin nickel, patina, black)
SSEN handle (nickel, satin, patina, black)
SSEN upper face plate (nickel, satin, patina, black)
UX inlay; available versions p. 80-81
additional charge for HERSE SET AKUSTIC 39 dB door added to the GOLD and SILVER packages or leaves)
clip-on square, 3 pcs (The clip-on square extends the adjustment range by 20 mm)
nagnetic stop (buffer) <sup>2)</sup> <b>NEW</b> available in six colours p. 132)
nulti-point bolt strip lock with two locks

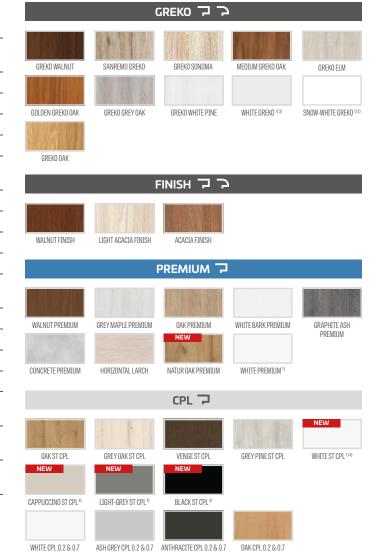

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> the stop prevents application of a drop-down gasket and vice versa

<sup>3)</sup> available only in STANDARD

<sup>4)</sup> special AntiFinger coating to reduce dirt and fingerprints



HERSE SET, laminate OAK PREMIUM, ESSEN handle





## HERSE MAX SET AKUSTIC 39 dB

NEW

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS

SOUND INSULATION 32 dB/39 dB P

GOLD PACKAGE SILVER PACKAGE

## **GENRAL INFORMATION**

- HERSE MAX SET Doors are designed for housing and public utility building as an entrance internal door (excluding the "80N" width).
- The HERSE MAX SET leaf with fixed and adjustable door frame with each of threshold available is rated for sound insulation at Rw = 32dB or, against an additional charge, Rw-39dB
- HERSE MAX SET Doors in GOLD and SILVER Packages are complete with a threshold, and have pre-drilled holes for handle and face plate installation for the GOLD version.

### **CONSTRUCTION**

- timber and MDF stile covered with two HDF boards
- specially designed solid core filling
- robust steel channel section reinforced
- door leaf thickness of 46 mm
- additional gasket in the door leaf

#### **FINISHING**


- · the STANDARD edge laminated in the same colour as the door leaf or, optionally, plain black edging (transverse larch, black edge with a transverse structure)
- moulded HDF board covered with PREMIUM laminate
- pre-cut up to 8 cm as an option
- side and top panels glued to the wall (only with the adjustable door frame and an 8 cm square) - page 134

#### HARDWARE

- three silver 2-pin hinges; Ø16; 3D adjustable
- two 3-pin Class 2 rated security locks with a thumb turn (optionally only lower)
- three hinge bolts on the hinge side
- possibility to apply an arm door closer
- . lower lock PZ centre is 72 mm
- optionally, a bolt strip lock with two cores, against an extra charge

#### **REBATED FIXED AND ADJUSTABLE DOOR FRAMES**

- optionally, an electric door strike can be used in the door frame for the lower lock with no upper lock in the door leaf.
- adjustable main keeper in frames
- The **80N** NEW width is available on the fixed door frame only

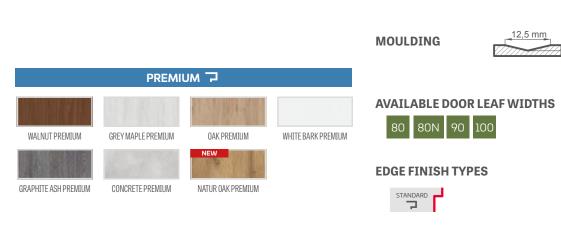

**DOOR LEAF** 

**GOLD PACKAGE** 

Presented model: HERSE MAX SET 23 in OAK PREMIUM finish with ESSEN handle

Door leaf with fixed timber door frame, stainless steel threshold and hardware 4) SILVER PACKAGE Door leaf with fixed timber door frame, stainless steel threshold, w/o hardware 4)

#### **ADDITIONAL CHARGES**

door viewer

black door leaf edge finish

hardwood threshold (lacquer) for adjustable frames 55 mm or stainless steel threshold with gasket

hardwood threshold (lacquer) for adjustable frames

arm door closer (silver, black, white, brown)

door closer reinforcement

drop-down gasket 1)

cutting the door leaf with a wooden frame up to 8 cm every and up to 6 cm with a steel frame in the CZ standard

"100" door leaf or package

30/45 lock core

30G/45 or 30/45G cylinder-holder

30/45 lock core and 30G/45 or 30/45G cylinder-holder in the master key system

metal covers of the hinge (satin nickel, patina, black)

ESSEN handle (nickel, satin, patina, black)

ESSEN upper face plate (nickel, satin, patina, black)

additional charge for the door HERSE MAX SET AKUSTIC39 dB (added to GOLD and SILVER packages or wing)

clip-on square, 3 pcs (The clip-on square extends the adjustment range by 20 mm)  $\,$ 

magnetic stop (buffer)<sup>1)</sup> **NEW** (available in six colours p. 132)

multi-point bolt strip lock with two locks



HERSE MAX SET 24



HERSE MAX SET 28



HERSE MAX SET 25



HERSE MAX SET 29



HERSE MAX SET 26



HERSE MAX SET 30



HERSE MAX SET 27




HERSE MAX SET 31



# FIXED AND ADJUSTABLE FRAMES

## HERSE SET, HERSE MAX SET

#### HERSE SET FIXED DOOR FRAME

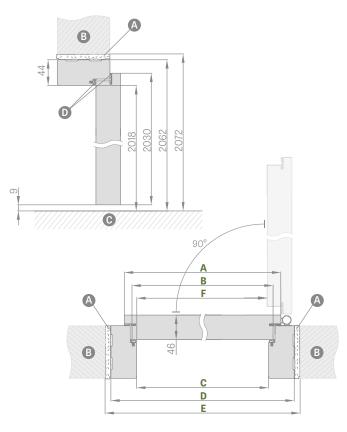


Door width	A	В	C	D	E	F
"80N"	804	777	764	852	872	756
"80"	844	817	804	892	912	796
"90E"	948	921	908	996	1016	900
"100"	1044	1017	1004	1092	1112	996


"90E" - investment width


#### ADJUSTABLE DOOR FRAME RANGE

strip 6 cm / strip 8 cm



#### ADJUSTABLE TIMBER THRESHOLD

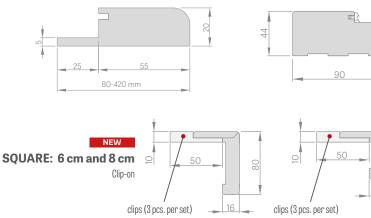

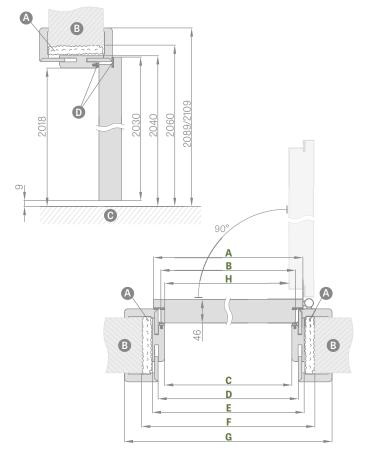

Door width	A	В	C	D	E	F	G	H	
"80"	844	817	804	826	848	888	946*/986**	796	
"90E"	948	921	908	930	952	992	1050*/1090**	900	
"100"	1044	1017	1004	1026	1048	1088	1146*/1186**	996	
* strip 6 cm / ** strip 8 cm									

A- installation foam
C- floor

B- wallD- rubber gasket

MASKING

#### FIXED DOOR FRAME

16





#### HERSE SET ADJUSTABLE DOOR FRAME

#### FIXED AND ADJUSTABLE DOOR FRAMES

	Adjustment range min-max (mm)
	80-100
	100-120
	120-140
	140-160
nent	160-180
1 Component	180-200
100	200-220
	220-240
	240-260
	260-280
	260-300
	280-300
ts	300-320
2 Components	320-340
Comp	340-360
— 2	360-380
	380-400
Г	400-420
3 Components —	



#### FIXED HARDWOOD TRESHOLD, COLOURLESS LACQUER 55mm




- The fixed frame, architrave and clip-on square in CPL 0.2 are also used in the set for door leaves in CPL 0.7
- Joints at 90 degrees of the adjustable frame possible with the 8 cm architraves only. .
- Electric door strike
- Door closer reinforcement for adjustable door frame –
  Square with three clips <u>NEW</u> (square with clips extends the adjustment range by 20 mm)
- Strip and guarter round
- Side and top panels glued to the wall available (only with an adjustable door frame and an 8 cm strip)
- Cutting the door (leaf and frame) up to 8 cm every 1 cm or the product as per the CZ standard



## HERSE SET, HERSE MAX SET

# HERSE SET ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001

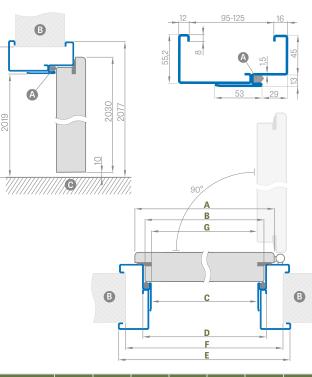

Door width	A	В	C	D	E	F	G
"80N"	804	777	761	787	877	855	756
"80"	844	817	801	827	917	895	796
"90E"	948	921	905	931	1021	999	900
"100"	1044	1017	1001	1027	1117	1095	996

#### "90E" - investment width


2066

Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305




# HERSE SET ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001

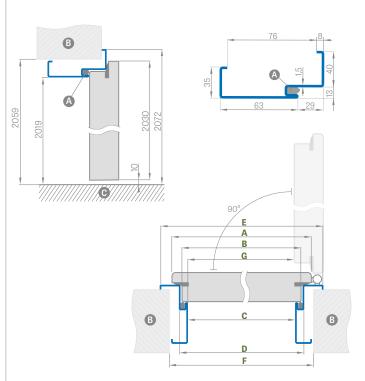

Door width	A	B	C	D	E	F	G
"80N"	804	777	761	787	867	841	756
"80"	844	817	801	827	907	881	796
"90E"	948	921	905	931	1011	985	900
"100"	1044	1017	1001	1027	1107	1081	996

#### **FITTING THE SQUARE FRAME**



#### **ADDITIONAL CHARGES**

"100" Square frame, large version

electric door strike

door closer reinforcement

cutting the door with the steel frame to 6 cm in 1 cm increments

stainless steel threshold


galvanised sheet steel


non-typical RAL (intensive, pearly and metallic colours not included)

# UNITED STEEL DOOR FRAME

### HERSE SET, HERSE MAX SET

#### UNITED STEEL DOOR FRAME DIAGRAM






Door width	A	B	C	D	E	F	G	H
"80"	844	817	791.5	859	933.5/973.5	899	790	935
"90E"	960	933	907.5	975	1049.5/1089.5	1015	906	1051
"100"	1044	1017	991.5	1059	1133.5 / 1173.5	1099	990	1135

"90E" - investment width

A-installation foam B-wall G-floor D-rubber gasket
 B- steel part painted in RAL colour

**6**-part MDF laminate

	Adjustment range min-max (mm)	
	140-160	
t t	160-180	
one	180-200	
1 component	200-220	
-	220-240	
	240-260	
	260-280	
	280-300	
2 Components	300-320	
Iodu	320-340	
<b>2</b> Co	340-360	
	360-380	
	380-400	

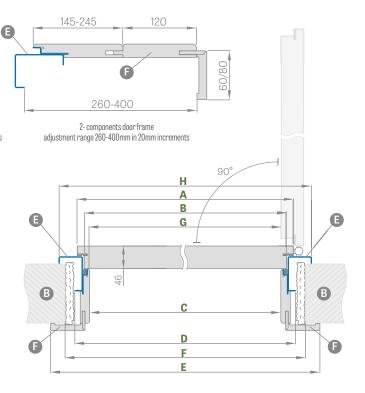

#### **ADDITIONAL CHARGES**

electric door strike

door closer reinforcement

shortening of a leaf with a UNITED steel door frame up to  $6\ \mathrm{cm}\ \mathrm{in}\ 1\ \mathrm{cm}$  increments

stainless steel threshold, height: 20 mm

galvanised sheet steel

non-typical RAL (intensive, pearly and metallic colours not included)





FIRE INTERNAL FRONT DOORS MADE IN HALSPAN TECHNOLOGY













LEDA

Type 4 glazing


Type 5 glazing

Type 6 glazing

Type 8 glazing

#### **ADJUSTABLE STEEL DOOR FRAME** (OVERLAPPING)

Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305

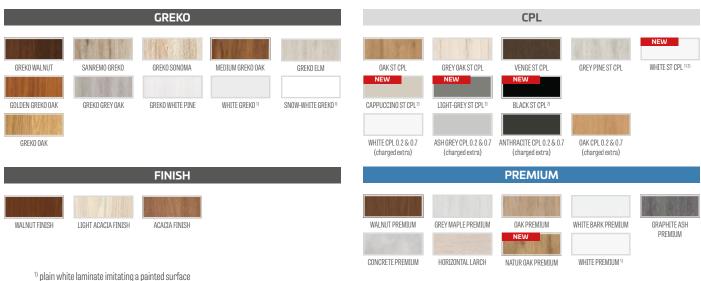

<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### **GENRAL INFORMATION**

Fire protection, smoke control and sound insulation are ensured only when a complete doorset is installed, including a fire door leaf (with gaskets, lock, hinges and drop-down gasket pre-assembled), door frame, door closer, as well as a lock core and handle in compliance with the Polish Standard.

The sound insulation of the HALSPAN door system supplied with a dropdown gasket as per PN-B-02151-03:1999 is rated at Rw=32 dB The door leaves are marketed complete with a timber or steel door frame only.

#### CONSTRUCTION

- filled with a special HALSPAN board with a thickness of 44 mm for Type EI30 and 54 mm for EI60
- overall door leaf thickness 50 mm in EI30 and 60 mm in EI60
- softwood door frame
- fire rated and smoke intumescent door gasket
- drop-down gasket
- transparent fire-resistant glass; the glass width is fixed (not dependent on) the door leaf width

#### FINISHING

- leaf edge made in the STANDARD technology (with CPL 0.2 & 0.7 laminates, laminated with the ABS edging in the same colour as the leaf only) or with a standard black edge against an additional charge
- 8 mm or 200 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides Applies to LEDA full only. NEW Inlay types shown on pages 80-81
- two-sided inlays only in full leaf and on only on the active leaf in doubleleaf doors
- the edge laminated in the same colour as the door leaf or, optionally plain black (transverse larch, black edge with a transverse structure) NEW
- side and top panels glued to the wall (only when fitted with an 8 cm square) page 134

#### HARDWARE

- four hinges; Ø16; 3D adjustable (2D for the steel frame)
- thumb turn cylinder lock
- · door closer against an additional charge

#### **DOOR FRAMES**

- fire rated fixed door frame
- fire rated gasket
- · adjustable door striker plate
- adjustable steel, square large or welded frames in RAL 9010, 8003, 8017, 7035, 7016, 1005
- fixed frame made of black sheet metal, thickness 1.5 mm, RAL powder painted, welded in the corners, fitted with a fire rated gasket and door closer reinforcement as standard.

#### **ADDITIONAL CHARGES**

fire rated door closer with scissor arm colours: silver, black, white, brown

fire rated cam-action door closer

(For frames with or without housing with a clip-on square) colours: silver, black, white, brown

fire rated ventilation grille

JOVE INOX handle, long face plate, lock core, see p. 127

30/40 lock core (EI30) or 30/50 (EI60)

fire-proof door viewer, satin, chrome

fire rated upper deadbolt lock

black door leaf edge finish

housing for EI30 from 100 to 460 and housing for EI60 from 120 to 480 every 40 mm double door housing

fire rated electric door strike (standard) 12/24V (not for the steel door frame)

steel door frame in RAL not in the range (intensive, pearl and metallic colours not included)

steel door frame made of galvanised sheet steel

EI30 Extra charge for Type 3, 4, 4, 5, 6, 8 glazing

EI60

Extra charge for Type 4, 6, 8 glazing

LUX INLAY: available versions p. 80-81 (on both sides on a full door leaf, and on an active double-leaf only)

CPL 0.2 laminate (for doors w/o housing)

CPL 0.7 laminate (for doors w/o housing)

clip-on square <sup>1)</sup> **NEW** 

(the clip-on square extends the adjustment range by 20 mm)

additional charge for the "110" leaf

side and top panels glued to the wall available (only with a wall installed door frame and an 8  $\rm cm$  square)


NEW

_	
_	





#### FIXED WOODEN DOOR FRAME




Door width	A	B	C	D	E	A fire-resistant instal
"80"	860	817	925	955	805	B wall
"90"	960	917	1025	1055	905	<b>G</b> floor
"100"	1060	1017	1125	1155	1005	D drop-down gasket
"110"	1160	1117	1225	1255	1105	

NEW/

clips (3 pcs. per set)

FIRE RATED DOOR FRAME CROSS-SECTION IN MASONRY AND WITH CLIP-ON SQUARE



**CLIP-ON SQUARE,** 

6 cm and 8 cm with clips


clips (3 pcs. per set)

TRACK MOUNTED DOOR CLOSER<sup>1</sup>

DOOR CLOSER

CROSS-SECTION IN BASIC MASONRY

FIRE RATED DOOR FRAME



FIRE RATED FIXED DOOR FRAME CROSS-SECTION




DOOR CLOSER WITH SCISSOR ARM




#### ADJUSTABLE STEEL FIRE DOOR FRAME (OVERLAPPING) Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001

Door width A B C D G F "80' 860 834 813 843 933 910 802 960 934 943 "90' 913 1033 1010 902 "100" 1060 1034 1013 1043 1133 1110 1002 "110" 1160 1134 1113 1143 1233 1210 1102

LARGE STEEL FIRE SQUARE DOOR FRAME (OVERLAPPING) Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001





Door width	A	В	C	D	E	F	G
"80"	860	834	813	843	923	890	802
"90"	960	934	913	943	1023	990	902
"100"	1060	1034	1013	1043	1123	1090	1002
"110"	1160	1134	1113	1143	1223	1190	1102

RAL							
RAL 9003 <sup>2)</sup> RAL 9010	RAL 9016	RAL 8003	RAL 8017	RAL 7016	RAL 7022 <sup>2)</sup>	RAL 7047	RAL 1001

<sup>2)</sup> additional charge +10%

116

# **LEDA EI30, EI60**

## **DOUBLE-LEAF DOORS**









LEDA 3 "90" + passive "60" door leaf

LEDA 6 "90" + passive "80" door leaf LEDA 4 "90" + "40" side panel

#### LEDA EI30 & EI60 DOUBLE-LEAF DOORS

- The double-leaf doors are made within the LEDA EI30 and EI60 ranges with prices depending on the colour and finish (STANDARD);
- The passive leaf is made in two versions:
- Plain; widths: "60", "70", "80"
  - glazed in types 5, 6, 7, 8 for EI30 and glazed in types 6 and 8 for EI 60
- Side panel for the widths of "30", "40" and "50"; fully plain in each variant;
- The passive leaf and side panel are supplied with shootbolt locks and bolt keepers; w/o edging strips.

#### **AVAILABLE ACTIVE DOOR LEAF WIDTHS** FOR DIFFERENT FIRE DOOR TYPES

IONDITIENEN	
LEDA	LEDA Type 3 glazing
EL30 EL60 80 90 100	EL30 90 100
LEDA Type 6 glazing	LEDA Type 7 glazing
EL30 EL60 80 90 100	EL30 80 90 100

L30 EL60 80 90 100

#### EL30 EL60 80 90 100 **AVAILABLE PASSIVE DOOR LEAF WIDTHS**

LEDA Type 4 glazing

EL30 EL60 90 100

LEDA Type 8 glazing

LEDA Type 5 glazing

EL30 80 90 100

FOR DIFFERENT FIRE DOOR TYPES					
LEDA	LEDA Type 5 glazing	LEDA Type 6 glazing			
EL30 EL60 60 70 80	EL30 70 80	EL30 EL60 70 80			
LEDA Type 7 glazing	LEDA Type 8 glazing				

EL30 70 80 EL30 EL60 70 80

#### **DOUBLE-LEAF DOOR PRICE**

The price includes

- Active part = price of full single leaf door, plus possible extra charges as for single leaf doors
- Passive part = price for the full version (also side panel), plus possible extra charges as for single leaf doors


#### **AVAILABLE DOOR LEAF WIDTHS**

active leaf 80 90 100	+ passive leaf 60 70 80
active leaf 80 90 100	+ full, plain side panel <b>30 40 50</b>

		DOUBLE FIRE DOOR   TIMBER DOOR FRAME						
	"110″	"120"	"130"	"140"	"150"	"160"	"170″	"180"
A Active door leaf width	860	860   960	860   960   1060	860   960   1060	860   960   1060	860   960   1060	960   1060	1060
B Passive door leaf/Side panel widths	347	447   347	547   447   347	647   547   447	747   647   547	847   747   647	847   747	847
C Frame opening width	1170	1270	1370	1470	1570	1670	1770	1870
F Frame outer width	1278	1378	1478	1578	1678	1778	1878	1978
E Opening width in the wall	1310	1410	1510	1610	1710	1810	1910	2010


# **ADJUSTABLE STEEL FIRE DOOR FRAME (OVERLAPPING)**

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001



Door Width	Α	В	С	D	E	F
"110"	860	347	1166	1196	1270	1287
"120"	860   960	447   347	1266	1296	1370	1387
"130"	860   960   1060	547   447   347	1366	1396	1470	1487
"140"	860   960   1060	647   547   447	1466	1496	1570	1587
"150"	860   960   1060	747   647   547	1566	1596	1670	1687
"160"	860   960   1060	847   747   647	1666	1696	1770	1787
"170"	960   1060	847   747	1766	1796	1870	1887
"180"	1060	847	1866	1896	1970	1987

#### LARGE STEEL FIRE SQUARE DOOR FRAME (OVERLAPPING) Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001



Door Width	А	В	С	D	E	F
"110"	860	347	1166	1196	1236	1276
"120"	860   960	447   347	1266	1296	1336	1376
"130"	860   960   1060	547   447   347	1366	1396	1436	1476
"140"	860   960   1060	647   547   447	1466	1496	1536	1576
"150"	860   960   1060	747   647   547	1566	1596	1636	1676
"160"	860   960   1060	847   747   647	1666	1696	1736	1776
"170"	960   1060	847   747	1766	1796	1836	1876
"180"	1060	847	1866	1896	1936	1976





INTERNAL FRONT FIRE AND BURGLAR-PROOF DOORS MADE IN THE ERKADO TECHNOLOGY



#### AVAILABLE DOOR LEAF WIDTHS



#### DOOR LEAF WITH FIXED TIMBER DOOR FRAME

HYPERION EI30 Leaf + fixed timber door frame				
"80″	"90″	"100"		





<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints

#### **GENRAL INFORMATION**

Fire protection, smoke control and sound insulation are ensured only when a complete doorset is installed, including a fire door leaf (with gaskets, lock, hinges and drop-down gasket pre-assembled), door frame, door closer, as well as a lock core and handle in compliance with the Polish Standard.

The sound insulation of the door with a drop-down gasket as per PN-B-02151-03:1999 is rated at Rw=39 dB

The door leaves are sold complete with a wooden door frame only.

The doors have an anti-burglary RC2 certificate for inward opening doors.

#### **CONSTRUCTION**

- special 44 mm thick filling .
- total door leaf thickness of 50 mm .
- softwood door frame
- fire rated and smoke intumescent door gasket
- drop-down gasket .

#### FINISHING

- leaf edge made in the STANDARD technology (with CPL 0.2 & 0.7 laminates, laminated with the ABS edging in the same colour as the leaf only) or with a standard black edge against an additional charge
- 8 mm or 200 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides **NEW**
- the edge laminated in the same colour as the door leaf or, optionally plain black (transverse larch, black edge with a transverse structure) NEW
- side and top panels glued to the wall (only when fitted with an 8 cm square) - page 134

#### HARDWARE

- four hinges; Ø16; 3D adjustable
- multi-point bolt strip lock with two locks
- door closer against an additional charge

The clip-on square extends the adjustment

range by 20 mm

#### **DOOR FRAMES**

fixed wooden fire protection door frame optionally with cladding

MASONRY

ARM DOOR CLOSER

(silver, black, white, brown)

fire rated gasket .

**FIRE RATED DOOR FRAME** 

IN MASONRY AND WITH

**CROSS-SECTION** 

**CLIP-ON SQUARE** 

Fitting clip

(silver, black, white, brown)

CAM-ACTION DOOR CLOSER 2)

adjustable door striker plate •

#### **ADDITIONAL CHARGES**

fire rated door closer with scissor arm colours: silver, black, white, brown

fire rated cam-action door closer

(For frames with or without housing with a clip-on square) colours: silver, black, white, brown

BONN handle, long face plate, lock core, see p. 127

BONN face plate (page 127)

core 30/40 (EI30)

fire-proof door viewer, satin, chrome

black door leaf edge finish

cladding for EI30 from 100 to 480 mm

LUX inlay; available versions p. 80-81

CPL 0.2 laminate (for doors w/o housing)

CPL 0.7 laminate (for doors w/o housing)

clip-on square <sup>1)</sup> NEW

(the clip-on square extends the adjustment range by 20 mm)

side and top panels glued to the wall available (only with a wall installed door frame and an 8 cm square)

#### FIXED WOODEN DOOR FRAME

#### B A 90 067 A D B B //////cY С D Door width C D Ε A B 817 925 955 805


"90"	960	917	1025	
"100"	1060	1017	1125	

A fireproofing foam B masonry C floor D drop gasket

CLIP-ON SOUARE. 6 cm and 8 cm with clips

clips (3 pcs. per set)





FIRE RATED FIXED DOOR FRAME CROSS-SECTION

905

1005

1055

1155



<sup>1)</sup> in the version with housing, the clip-on square is included


<sup>2)</sup> use the cam-action door closer for a fixed door frame only or for frames with a clip-on square










#### HANDLES FOR PANEL, STILE DOOR LEAVES The handle not to be used for panel door leaves with casing frames, see p. 158

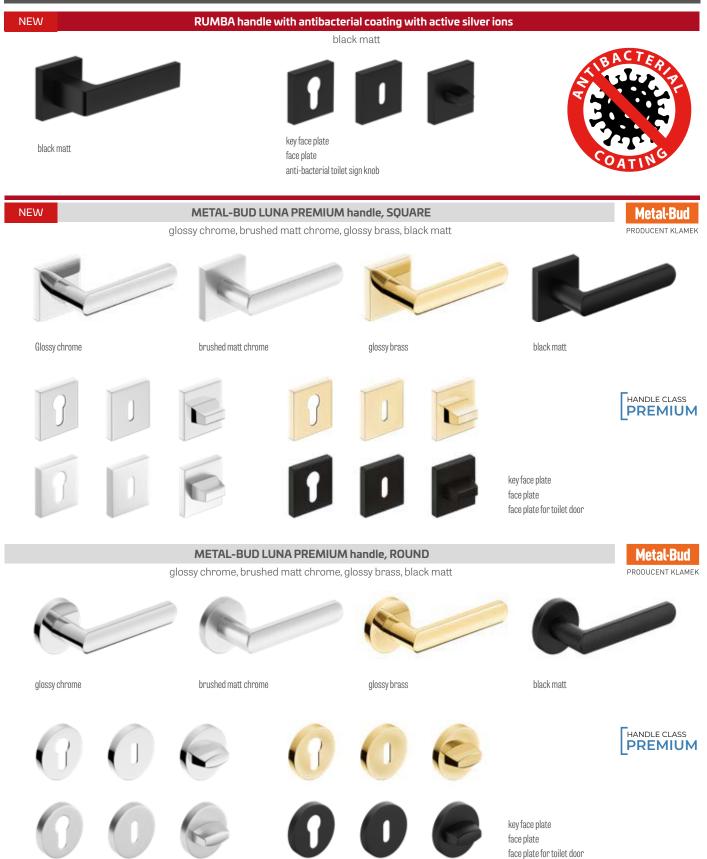

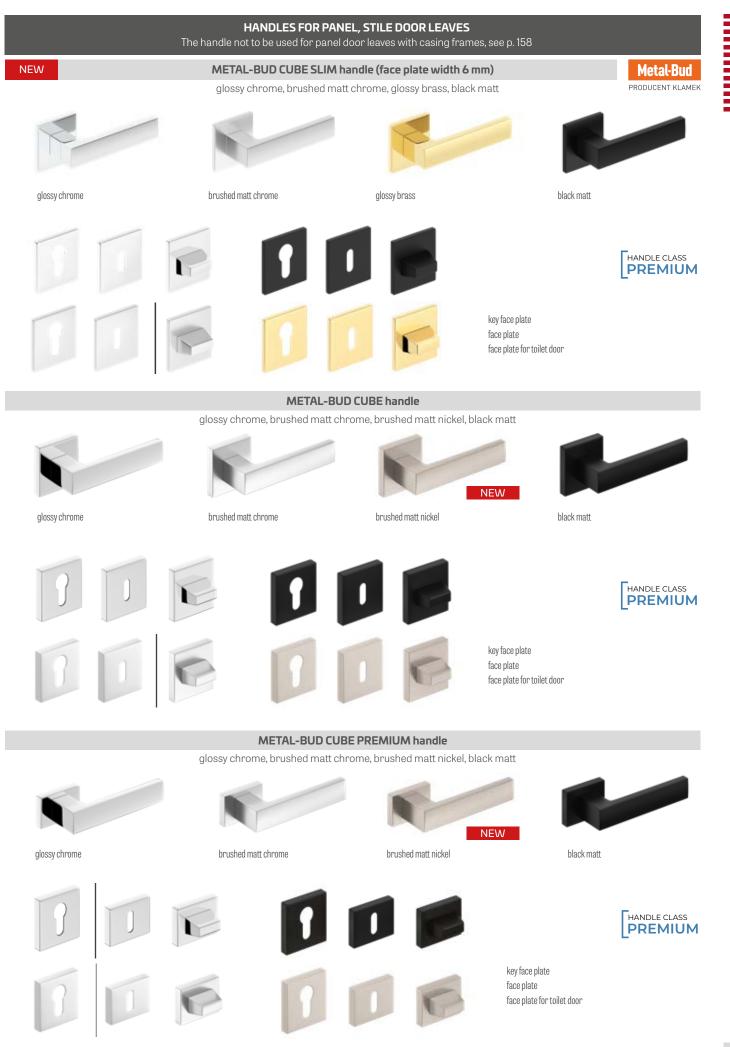


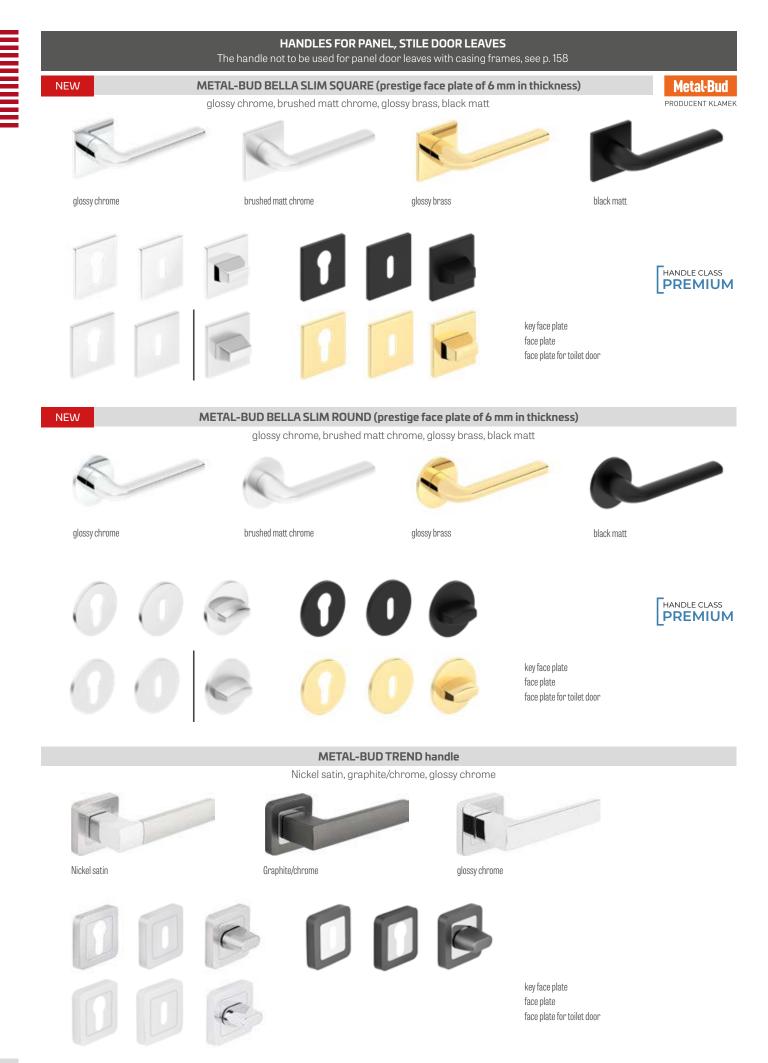

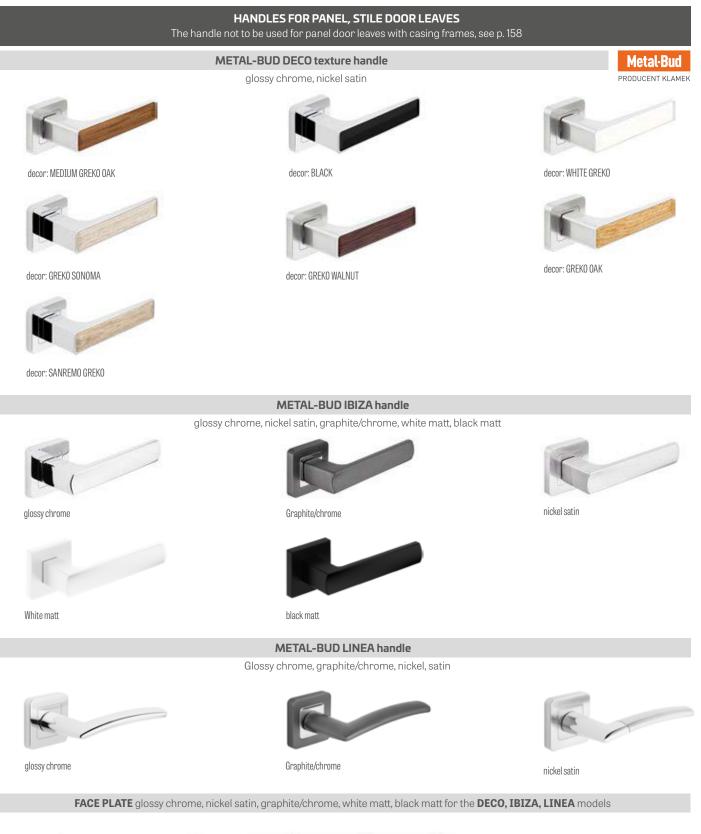



	The handle not to be used for pane	NEL, STILE DOOR LEAVES el door leaves with casing fram	es, see p. 158	
NEW		JD QUBIK handle		Metal-Bud
F		glossy, white matt, black matt		PRODUCENT KLAM
NE QUBIK handle nickel, velvet	QUBIK handle chrome glossy	QUBIK handle, white matt	NEW	NEW BIK handle, black matt
	METAL-BUD	BARCELONA handle		
-		ossy chrome, black matt		
F				
BARCELONA handle nickel, velvet	NEW BARCELONA handle glossy chrome	BARCELONA handle, black r	NEW natt	
FACE F	LATE nickel, velvet, glossy chrome, white	e matt, black matt for the <b>QUBI</b>	K, BARCELONA mod	lels
			key face plate face plate face plate for toilet door	
		DERKADO handles ainless steel		
SAPPHIRE IN		METRO INOX handle		PROXIMA INOX SQUARE handle
TOPAZ INOX F	andle	ONYX INOX handle		NOVA INOX SQUARE handle
NOVA INOX h	ndle, round	JOVE INOX handle		ROMA INOX handle
face plate		Key face plate	F	face plate for toilet door
face plate		Key face plate	F	face plate for toilet door

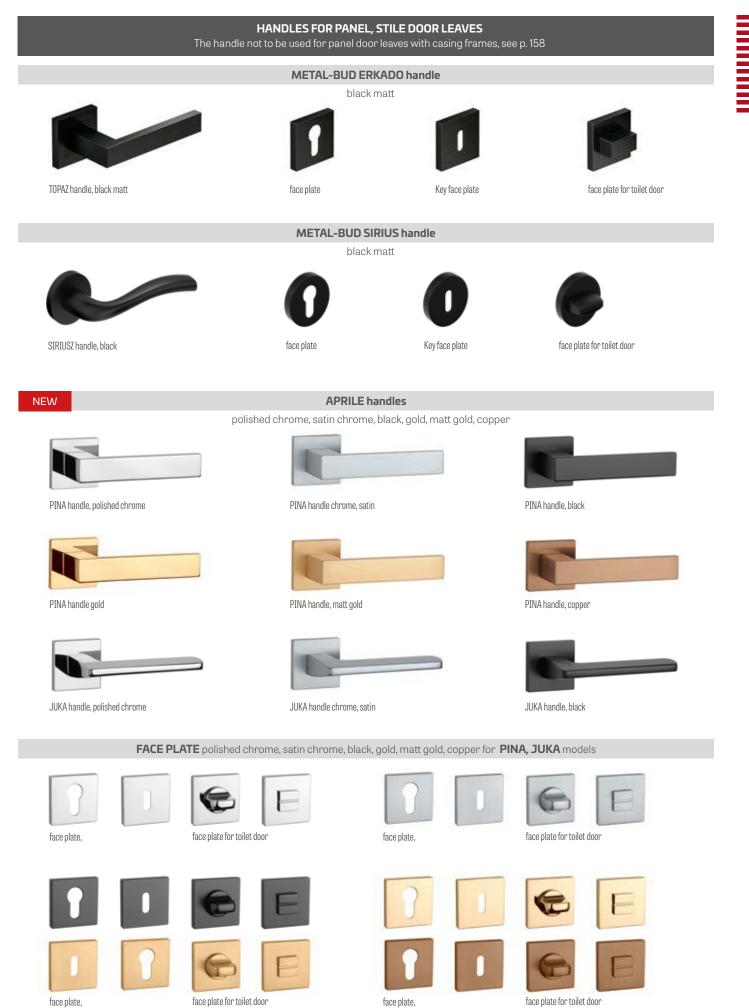

face plate,

125

#### HANDLES FOR PANEL, STILE DOOR LEAVES The handle not to be used for panel door leaves with casing frames, see p. 158

#### **GAMET** handles

brushed chrome, glossy chrome, brushed nickel, antique brass



MISTICO handle glossy chrome

ERBA handle

brushed nickel





**FRBA** handle antique brass









face plate for key and lock core face plate for toilet door







CASCADA handle brushed nickel



CASCADA handle antique brass











face plate for key and lock core face plate for toilet door

#### HANDLES FOR PLATE, STILE LEAVES, WITH LONG FACE PLATE

The handle not to be used for panel door leaves with casing frames, see p. 158

(DOES NOT APPLY TO SYDNEY and QUBIK handles, long face plate). The handles with a long face plate are not to be used for non-rebated doors




ASTRA and SYDNEY handles, nickel, patina face plate for toilet door

ASTRA handle, nickel, satin face plate

ASTRA handle, nickel, satin face plate, economy

face plate for toilet door

face plate

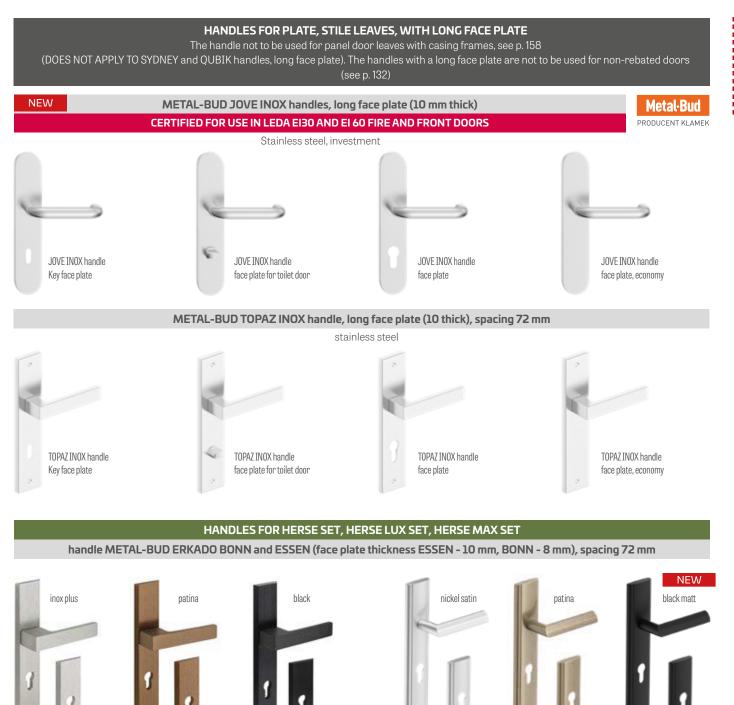

BONN handle and face plate

BONN handle and face plate, black

ESSEN handle and face plate

LOCK CORES



Lock cores in the master key system 30/45 + 30G/45

Lock cores in the master key system 30/45 + 30/45G

Outwards opening doors

Inwards opening doors



Nickel satin

LOCK CORE	LOCK CORE WITH Thumbturn
Size	Size
26/36	G30/40
30/30	G40/30
30/45	G30/50
30/50	G50/30
	30/45G
	30G/45



# **TECHNICAL INFORMATION**

#### **DOOR OPENING DIRECTIONS**






#### **DOUBLE DOORS**





## HOW TO SELECT A LOCK CORE



Example of calculating the lock core size for the flush and stile doors (40mm) with the face plate thickness of G = 7 mm A/B = (C+G+3)/(D+G+3)A/B = (15+7+3)/(25+7+3)A/B = 25/35

Door type	Door leaf thickness	Proportion of lock setting in door (C/D)	Recommended lock core size (A/B)*
Flush, stile (rebated)	40 mm	15/25	26/36
Flush, stile (non-rebated)	40 mm	20/20	30/30
HERSE	46 mm	15/31	30/45
LEDA EI 30	50 mm	19/31	30/40
LEDA EI 60	60 mm	19/41	30/50
FORTECA RC2 & RC3	46 mm	20/26	30/40
HYPERION EI30 RC2	50 mm	19/31	30/40

\* Recommended lock core size for the escutcheon thickness of 7 mm and play of 2 mm to 4 mm

#### **REBATED, NON-REBATED, REVERSE DOORS**




#### **DOOR FRAME JOINTS**





#### HOW TO CALCULATE DOOR PRICE

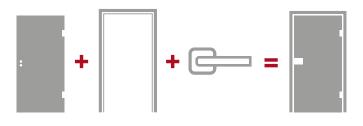

#### AVAILABLE SOLUTIONS (pp. 135-143)

• wall-mounted sliding door systems, single door	SP1N
• wall-mounted sliding door systems, double-leaf doors	SP2N
pocket sliding door systems, single-leaf doors	SPIC
• pocket sliding door systems, double-leaf doors	SP2C
• supplementary system ZN1	ZNI
supplementary system ZN2	ZN2
double-leaf doors	

# FINISH

The Finish laminate is pre-impregnated, which means printing and then coating with paint with required properties. Using the performance finishing coats adds to the surface's basic resistance.

# GREKO

The Greko laminate is also pre-impregnated, which means printing and then coating with paint with required properties. Using the performance finishing coats adds to the surface's resistance and flexibility of the product. The paint's silicon content ensures the film resistance is enhanced.

The Greko laminate is manufactured on a high density Japanese base layer which is not resin coated. This makes the film ecological, healthy and safe for people and environment both in the production process and during use, as well as for disposal. No formaldehyde or other harmful ingredients is used.

Its distinctive patterns are what distinguishes the Greko film. The laminates bear striking resemblance to wood, as the high quality surface comes with a 3D natural wood effect. Woodgrain decors look just like wood

# PREMIUM

The Premium laminate is a product based on Polypropylene (PP), a material of very high resistance to abrasion and scratching, plus top quality appearance. It adds a refined looks and individual character to the doors, as it imitates natural wood perfectly.

Not only does the Premium laminate attracts with its appearance but with its functionality, as it resists scratching better than average products and is fire-retardant and abrasion resistant.

These properties ensure the extended longevity and maintenance-free use of the PREMIUM range products even in most adverse conditions.

# ST CPL, CPL 0,2 and CPL 0,7

The CPL laminate is composed of a decorative layer impregnated in resins, and a base layer ensuring flexibility. Following the lamination process, the top resin layer is hardened for high resistance to scratching and abrasion. It is characterised by high resistance to impact, abrasion, scratching, heat and UV radiation

Thanks to using this type of material, the door can be installed in so-called "difficult" interiors [exposed to heat, moisture or extraordinary use]. Approx. laminate thickness: ST CPL - 0,15 mm, CPL 0,2 - 0,2 mm and CPL 0 CPL 0,7 - 0,7 mm. The CPL 0.7 laminate is used to cover only one leaf plane thanks to its unique hardness. The CPL 0,2 and CPL 0,7 laminated door leaves come with the leaf edge made of the so-called ABS, a highly durable PVC.

ST CPL laminate in decors white, light grey, cappuccino, black has been refined in the AntiFinger coating limiting dirt and fingerprints.

# **UV VARNISH**

The door surface has several coats of the WHITE TITANIUM UV modern UV hardened varnish.

The flat surfaces are covered with a specialist base membrane in the first phase, and then coated twice with a top quality paint and hardened with UV.

The moulded surfaces cannot be covered with the membrane for technological reasons, so they are coated with three paint layers and hardened with UV.

The fully automatic coating process follows scanning to ensure ideal quality of the surface. Hardening the paint with the cutting-edge method involving UV light source ensures very high mechanical resistance.

#### **EDGE FINISH TYPES**

# EDGE **SOFT**



The SOFT door leaf comes with a chamfered edges, which lends an aesthetic and modern look to it. The leaf is finished with a laminate of an improved resistance to scratching, which dramatically enhances its resistance during use.



# **STANDARD** EDGE




It involves covering the flat plane with the 0.15 mm ST CPL laminate, CPL 0.2 , CPL 0,7 laminates, polypropylene PREMIUM laminate, GREKO laminate or FINISH film.


The door leaf made in STANDARD technology has unchamfered edges, which is where the face panel is joined with edging laminate, as shown in the diagram. The laminate in the CPL 0.2 and CPL 0,7 laminates is made of very durable PVC, the so-called ABS. The joining method of the laminate is also identical for the non-rebated doors and non-rebated sliding systems.

#### **STILE DOOR LEAF**

885

2030







A MDF or timber stiles in PREMIUM laminate B MDF rails



Solid 35 mm or 22 mm thick rail



Aesthetic frameless tongueand-groove glazing without bars




MDF stile for GREKO and CPL laminates with the AntiFinger coating NEW



coating

#### PANEL DOOR LEAF

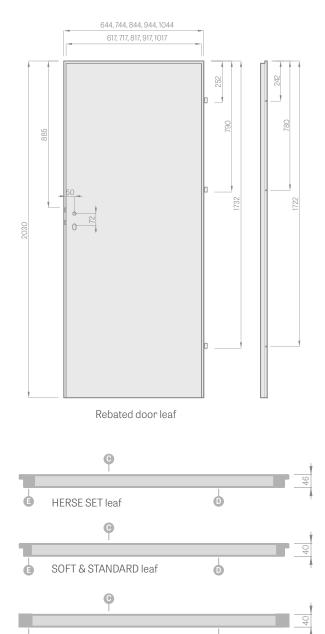

- NON-REBATED door leaf Ġ Ó
- A MDF board; B gasket; C HDF board; D filling; MDF or timber stiles in Herse SET and UNO PREMIUM

#### **FILLING TYPES**

#### Honeycomb


solid core filling





Glulam timber stile for PREMIUM and Honeycomb and solid core filling in the panel doors ONLY. CPL surfaces without the AntiFinger For the flush doors we add a third hinge as standard.

#### **FIRE DOOR LEAF**

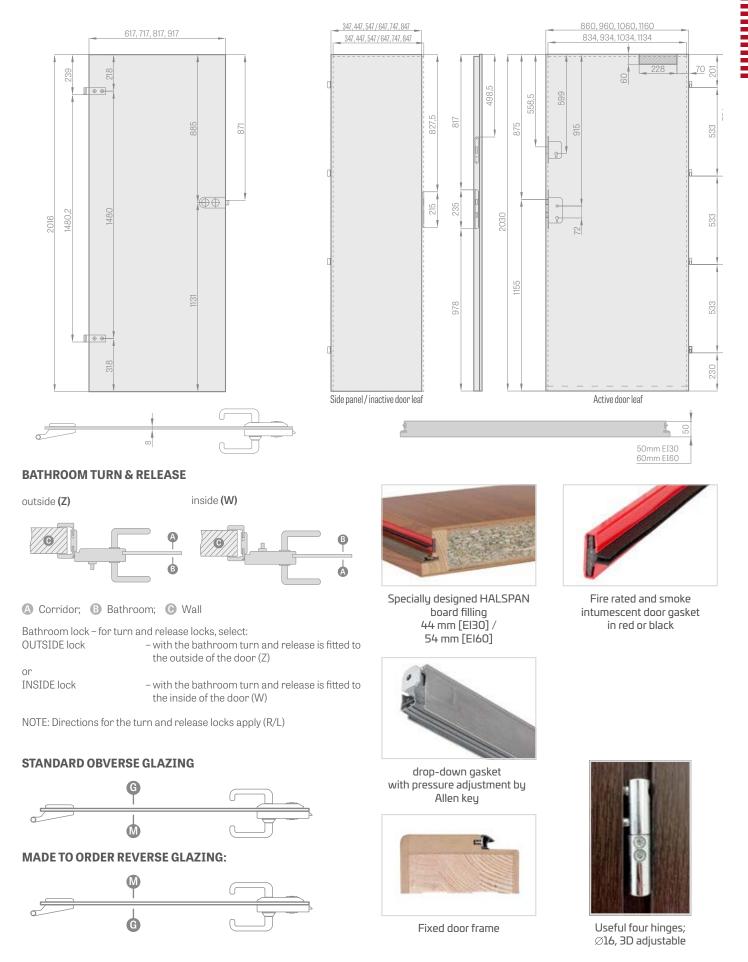

G plain side; M ornamented matt side;

#### CONCEALED MAGNETIC STOPS



chrome glossy, chrome satin, brass glossy, colourless, white semi-matt, black semi-matt

We assemble the magnetic door stop in a special place milled for this purpose on our own.

Product delivered as a separate assortment.

Caution (important information in case of underfloor heating): the floor element should be placed in the Ø14mm hole, 45 mm deep.

#### **METAL CAPS FOR HINGES**



Brushed nickel, patina, glossy chrome, glossy brass, white matt and black matt

- Can sizes:
- ID 16 mm for HERSE SET and FORTECA door types and fire-rated LEDA AND HYPERION
- ID 15 mm for panel and stile doors



#### VENTILATION





Plastic sleeves for FINISH colour group




GREKO, PREMIUM and CPL decors



#### VENTILATION

Ventilation door cut not available in non-rebated door leaves for wall-mounted and pocket sliding doors.



#### **ELECTRIC DOOR STRIKE**

(Available for fixed and adjustable door frames for rebated doors, see p. 161-163, but unavailable for the door frames used with the GRAF glass panes and double-leaf doors)

Types of electric doo – basic 12 V – basic 24 V – switch operated 12	– switch operated 24 V – reverse 12 V
BASIC SWITCH OPERATED REVERSE	<ul> <li>normally closed, and opened when voltage is fed</li> <li>same operation as in the basic strike, but with an option to be switched off by moving the springbolt</li> <li>closed when voltage is fed, opened when not</li> </ul>

The reverse and switch operated electric door strikes unavailable for the fire doors

#### **CUTTING THE DOOR LEAVES**

Cutting the door leaves to size by customer acc. to Polish standard, up to 50 mm, or up to 80 mm for the HERSE SET door leaves (unless pre-cut), as well as in the panel door leaves, is possible if an additional lower strip has been fitted by the manufacturer.

(NOTE: cutting the door leaves to size by customer is not allowed for the FRAGI doors, double-leaf and fire doors, non-rebated leaves for sliding systems, glass GRAF doors, FORTECA RC2 and FORTECA RC3 burglar-proof doors, and stile doors acc. to the CZ standard).


The door leaf height made acc. to the so-called CZ standard is lower than the PL standard by 47 mm.

#### **CLEANING, REVITALISATION & REGENERATION KIT FOR OTTI-MO DOORS**



#### HARDWARE

#### **DEADBOLT LOCKS**



1. For rebated door leaves, the PZ centre of the key operated deadbolt lock, toilet lock and core lock is 72 mm.

2. For non-rebated and reverse door leaves, the PZ centre of the magnetic lock is: -90 mm (key operated and toilet locks)

-85 mm (core locks)

The toilet locks have a square-shaped bolt hole:

-acc. to PL standard: 4 mm - acc. to CZ standard: 6 mm



#### **"REVERSE" GLAZING MADE TO ORDER**



🕒 plain side 🚺 matt side with decoration or colourless side with decoration

#### **GLAZING TRANSLUCENCY ILLUSTRATION**



GRAF1 tempered, painted glass



tempered, painted glass



GRAF 29 laminated glass

FACTORY-DRILLED HANDLE OPENINGS





Tempered alass decormat frosted



Transparent tempered glass

GRAF 8

decormat

FROSTED and BLACK VSG 221, 331, 441 LAMINATED GLASS

**CLEARANCE UNDER DOOR LEAF AFTER INSTALLATION** Please check the lower clearance dimensions on all products prior to

installation, as the allowable deviation due to frame dimensional tolerance

for STILE and panel doors

Matt or black laminate

is +- 3mm

GRAF 9 transparent





Plain glass

GRAF 26 dark grey




Frosted VSG



Drilling of openings for the handle in stile doors in the PREMIUM and ST CPL laminates for handles with a split face plate available in the Erkado offer.

#### **INSTALLATION OF FRAME FOR NON-REBATED DOOR FRAMES**



A Drill holes for metal screws of min length 80 mm x  $\emptyset$ 6 mm

B Apart from installation foam, mounting anchors are required when installing the door frame. Drill the holes for screws under the gasket so that it hides them.





Concealed hinge

Concealed hinge, black

Door leaf flush with the frame





Magnetic lock, black

Magnetic catch





Adjustable magnetic catch strike



Adjustable magnetic catch strike, black

133






















# **DOOR FRAME EXTENSION PANELS**

WALL-MOUNTED





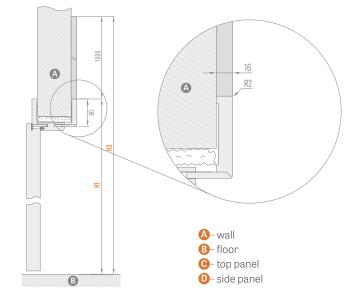

INTE	RNA	L DOC	DRS <sup>1)</sup>		F	RON	T DOO	<b>R</b> (panels	on the s	staircase	side doo	or opening	g inwards	s)		
Frame type	H1	H3	Width	<b>S1</b>	Frame type	H1	H3	Width	S1			S	3			
			"60"	786		frame 2109		"80"	986	1186	1236	1286	1386	1486	1586	
			"70"	886	Adjustable door frame HERSE		3109	"90"	1086	1286	1336	1386	1486	1586	1686	
Adjustable door frame rebated	2109	3109	"80"	986	HEROE			"100"	1186	1386	1436	1486	1586	1686	1786	
robatou			"90"	1086				"80N"	1012	1212	1262	1312	1412	1512	1612	
			"100"	1186	Fixed door frame	2142	3142	"80"	1052	1252	1302	1352	1452	1552	1652	
			"60"	811	HERSE "clip"	2142	3142	"90"	1152	1352	1402	1452	1552	1652	1752	
		911				"100"	1252	1452	1502	1552	1652	1762	1852			
Adjustable door frame NON-REBATED 2122	2122	3122	"80"	1011	Fixed door frame FORTECA "clip"	2147		"80N"	1012	1212	1262	1312	1412	1512	1612	
			"90"	1111			91/7	3147	"80"	1056	1256	1306	1356	1456	1556	1656
			"100"	1211			0141	"90"	1156	1356	1406	1456	1556	1656	1756	
			"60"	791				"100"	1256	1456	1506	1556	1656	1756	1856	
			"70"	891				"80N"	990	1190	1240	1290	1390	1490	1590	
REVERSE DOOR FRAME (flush side with the leaf)	2122	3122	"80"	991	Adjustable fixed frame FORTECA	2136	3136	"80"	1034	1234	1284	1334	1434	1534	1634	
(nuon oldo with tho loar)			"90"	1091	(on the panels side)	2130	3130	"90"	1134	1334	1384	1434	1534	1634	1734	
			"100"	1191	()			"100"	1234	1434	1484	1534	1634	1734	1834	
			"60"	834				"80"	1085	1285	1335	1385	1485	1585	1685	
			"70"	934	Fixed door frame LEDA. HYPERION "clip"	2147	3147	"90"	1185	1385	1435	1485	1585	1685	1785	
REVERSE DOOR FRAME	2144	3144	"80"	1034	LEDA, ITT LIADIN CIP			"100"	1285	1485	1535	1585	1685	1785	1885	
			"90"	1134	Adjustable fixed frame			"80"	1063	1263	1313	1363	1463	1563	1663	
			"100"	1234	LEDA, HYPERION	2136	3136	"90"	1163	1363	1413	1463	1563	1663	1763	
		TOP PA	NEL (1000 x S1) <sup>1)</sup>		(on the panels side)			"100"	1263	1463	1513	1563	1663	1763	1863	
													9.,	0.,	0	

PANEL 200	PANEL 250	PANEL 300	2 x Panel 200	2 x Panel 250	2 x Panel 300
SINGL	E-FACE SIDE	PANEL	DOUBL	E-FACE SIDE	PANEL

DOOR FRAME EXTENSION PANELS<sup>2)</sup> **FINISH / GREKO** CPLO,2, ST CPL and PREMIUM

PAINTED


<sup>1)</sup> only top panels are available for interior door frames

<sup>2)</sup> the panels shall be edged on all four edges in a colour similar to that of the panel surface

# **SLIDING SYSTEMS**

## WALL-MOUNTED

#### WALL-MOUNTED SLIDING DOOR SYSTEM:



Price includes:

Aluminium track with a cover profile and door stop in the colour of the door leaf and length:

- 210 cm for "100" leaves
- 200 cm for "90" leaves
- 180 cm for "80" leaves
- 150 cm for "70" "60" leaves

#### Available wall-mounted sliding system sets

- track with a cover profile and door stop with gasket (only SP1Nz & SP1Nb)
- track with a cover profile and tunnel door frame (only for SP2N)
- track with a cover profile and door stop + tunnel door frame (only SP1Nz & SP1Nb)
- track with a cover profile and door stop with gasket + tunnel door frame (only SP1Nz & SP1Nb)

The non-rebated door leaf for wall-mounted sliding system cannot be cut to size.

The cover profile is neither laminated nor paint coated on the inside.

#### **ADDITIONAL CHARGES**

tunnel type adjustable door frame for the price of the adjustable door frame

#### hook bolt lock with hardware

only for the single system

oval, rectangular or round pull handle; glossy chrome, brushed chrome, glossy brass, black matt; two pcs. of pull handles per set

#### synchronisation

simultaneous opening and closing of the door leaves using only one leaf; only for SP2N

#### soft closing damper

automatic leaf damping during the final closing phase only for SP1Nz and SP1Nb

#### ROUND, OVAL AND RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt



#### **HOOK BOLT KEY LOCKS**

glossy chrome, brushed chrome, glossy brass, black matt


Key only in silver

The hook bolt key lock comes with two pull handles to choose



## WITH DOOR OPENING HOUSING

SP1Nz or SP1Nb (left, obverse version)

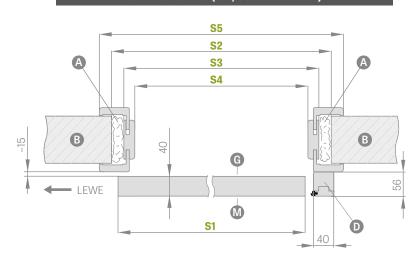

SP2N (obverse version)

**S**5 **S2** 

**S**3

**S4** 

G

0

**S1** 

40


**S1** 

A

B

LEWE

ç

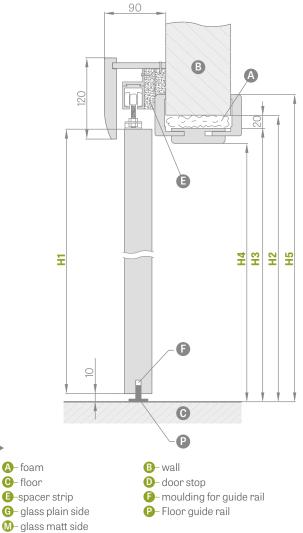

				MOUNTED		DOOR SYS	STEM WITH DOOR OPENING HOUSING DOUBLE-LEAF DOORS				
		"60"	"70"	"80"	"90"	"100"	"60" x 2	"70" x 2	"80" x 2	"90" x 2	"100" x 2
<b>S1</b>	Door leaf width	644	744	844	944	1044	1288	1488	1688	1888	2088
<b>S2</b>	Opening width in the wall	688	788	888	988	1088	1288	1488	1688	1888	2088
<b>S</b> 3	Frame outer width	648	748	848	948	1048	1248	1448	1648	1848	2048
<b>S4</b>	Frame opening width	604	704	804	904	1004	1204	1404	1604	1804	2004
<b>S</b> 5	Frame cover width Architraves 6 cm /Architraves 8cm	746 / 786	846 / 886	946 / 986	1046/ 1086	1146 / 1186	1346/ 1386	1546/ 1586	1746 / 1786	1946/ 1986	2146 / NA
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Opening height in the wall	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060
H3	Frame outer height	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
H4	Frame opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018
H5	Frame cover height strip 6 cm /strip 8cm	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089 / 2109	2089/ 2109	2089/ 2109	2089 / 2109	2089/ 2109	2089/ NA

A

B

PRAWE -

-

C-floor

LOFT STANDARD TYPE




#### Leaf BALDUR 7, laminate WHITE TITAN UV, black rectangular handle, handles INDUSTRIAL

The LOFT STANDARD single sliding system is available with all leaves in the SP1Nb standard wall mounted sliding system.

Double sliding system LOFT STANDARD consists of two single systems and a connecting element for rails.

Double LOFT STANDARD system is counted as 2 x single system + connecting element for rails. Choice of two handles holding the leaf: INDUSTRIAL and RETRO (page 138).

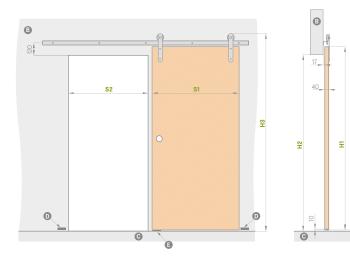

		"60"	"70"	"80"	"90"	"100"
<b>S1</b>	Door leaf width	644	744	844	944	1044
<b>S</b> 2	Opening width in the wall <sup>1)</sup>	574	674	774	874	974
H1	Door leaf height	2030	2030	2030	2030	2030
H2	Opening height in the wall	1962	1962	1962	1962	1962
H3	Overall system height	2170	2170	2170	2170	2170


#### GUIDE RAIL FOR SINGLE SYSTEM LENGTH:

- 200 cm for "60" "70" "80" leaves

- 250 cm for "90" "100" leaves

door closer on one side

connector for tracks (enables the use of the LOFT system in the double-leaf system)



		"120"	"140"	"160"	"180"	"200"
<b>S1</b>	Door leaf width	2 x 644	2 x 744	2 x 844	2 x 944	2 x 1044
<b>S2</b>	Opening width in the wall $^{\scriptscriptstyle 1\!\!\!)}$	1202	1402	1602	1802	2002
<b>S</b> 3	Guide width	1500	1500	2000	2000	2200
<b>S4</b>	Total guide width <sup>2)</sup>	3000	3000	4000	4000	4400
H1	Door leaf height	2030	2030	2030	2030	2030
H2	Opening height in the wall	1962	1962	1962	1962	1962
H3	Overall system height	2170	2170	2170	2170	2170

B- wall
 C- floor
 D- wall mounted buffer
 E- guide
 C- guide connector <sup>2)</sup>

<sup>1)</sup> the leaf in the closed position overlaps 35 mm on each side

<sup>2)</sup> a guide for double-leaf system consists of two guides connected with a connector

LOFT Type



LOFT TILES, laminate OAK ST CPL, round handles, RETRO handles

LOFT Type wall-mounted sliding door system is available in black and comes complete with the LOFT Type plain door leaf. The LOFT door leaf comes with the stabilising "honeycomb" filling as standard or solid core for extra charge. The door leaf features a non-rebated edge. The system is designed for clear finished opening, without a tunnel.

The complete system includes the sliding LOFT system + LOFT door leaf + pull handle + door closer on one or both side(s).

The double LOFT system is counted as 2 x single system + connecting rail element. Choice of two handles holding the leaf: INDUSTRIAL and RETRO.

#### LOFT sliding door system

oval, rectangular or round pull ha	ndle

solid core filling

round and square metal ventilation sleeves (4 pieces); black matt

door closer on one side


connector for tracks (enables the use of the LOFT system in the double-leaf system)

black door leaf edge finish





<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints



			10			100
<b>S1</b>	Door leaf width	644	744	844	944	1044
<b>S2</b>	Opening width in the wall	574	674	774	874	974
H1	Door leaf height	2150	2150	2150	2150	2150
H2	Opening height in the wall	2082	2082	2082	2082	2082
		<b>B</b> -wall	<b>€</b> – floo	or 🛈- v	vall moun	ted buffer

#### ROUND, OVAL, RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt



#### **GUIDE RAIL LENGTHS:**

- 200 cm for "60" "70" "80" leaves
- 250 cm for "90" "100" leaves

#### **LEAF-HOLDING HANDLES**



138

**MAGIC** Type



0

MAGIC LEAF, laminate OAK PREMIUM, oval pull handle

8

MAGIC Type wall-mounted sliding door system is available complete with the MAGIC Type plain door leaf only. The MAGIC door leaf comes with the stabilising "honeycomb" filling as standard or solid core for extra charge. The door leaf features a non-rebated edge. The system is designed for clear finished opening, without a tunnel.

The complete system includes the sliding MAGIC system + MAGIC door leaf + pull handle. The system is only available as a complete set (system + leaf).



oval, rectangular or round pull handle

solid core filling

round and square metal sleeves (4 pcs); glossy chrome, brushed chrome, black matt

black door leaf edge finish

	MAGIC DOOR LEAF	
PREMIUM / CPL	CPL 0.2	WHITE TITANIUM UV PAINT



#### **ROUND, OVAL, RECTANGULAR PULL HANDLES**

glossy chrome, brushed chrome, glossy brass, black matt









LEAF EDGE FINISH


<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints





**S**2



	MAGIC WALL-MOUNTED SLIDING DOOR SYSTEM						
		"60"	"70"	"80"	"90"	"100"	
<b>S1</b>	Door leaf width	644	744	844	944	1044	
<b>S2</b>	Opening width in the wall	584	684	784	884	984	
<b>S</b> 3	Transition light	464	564	664	764	864	
H1	Door leaf height	2150	2150	2150	2150	2150	
H2	Opening height in the wall	2100	2100	2100	2100	2100	

B-wall C-floor

### **GRAF GLASS DOORS**



GRAF 38 SYSTEM

Sliding system for glass doors with a silver anodised aluminium or back matt powder-painted cover.

This system is complete and designed for fitting in a clear finished opening, as the tunnel is not available. The system range includes all GRAF glass panes, see p. 58/-59 and go to our website: www.erkado.pl and the B2B panel.

The complete system includes: sliding SYSTEM GRAF + glass pane SYSTEM GRAF + pull handle + door closer on one side

#### **GLASS DOOR SLIDING SYSTEM**

- silver anode

- black matt NEW


double-sided round pull handle, stainless steel

double-sided round pull handle, stainless steel, black matt

"90" glass pane extra charge

closer

	WALL-MOUNTED GLASS DOOR SLIDING SYSTEM								
		"60"	"70"	"80"	"90"				
<b>S</b> 1	Door leaf width	662	762	862	962				
<b>S2</b>	Opening width in the wall	602	702	802	902				
<b>S</b> 3	Guide rail length	1500	1500	1800	2000				
H1	Door leaf height		20	36					
H2	Opening height in the wall	max 2020							
H3	Overall system height		21	14					



stainless steel, matt black

**PULL HANDLE** 



### **POCKET SYSTEMS**

#### **ERKADO** pocket door system range includes:

BASIC TUNNEL INSTALLATION							
SP1C.100	PIC.100 Single "100" pocket sliding system Only available for STILE doors, painted doors and ALTAMURA 1, UNO PREMIUM and UNO LUX models						
SP2C.100	SP2C	Double "100" pocket sliding system Only available for STILE doors and ALTAMURA 1, UNO PREMIUM and UNO LUX models					
SP1C.125	SPIC	Single "125" pocket sliding system					
SP2C.125	SP2C	Double "125" pocket sliding system					
ZN1		One-sided supplementary basic in-wall installation for SP1C.100 or SP1C.125 system					
ZN2	ZN2	One-sided supplementary basic in-wall installation for SP2C.100 or SP2C.125 system					

#### Not available for CPL0.2 & CPL0.7 laminates



#### Standard single/double pocket sliding system includes:

- aluminium case [LEON] SP1
- aluminium case [LEON] SP2
- non-rebated door leaf / two non-rebated door leaves price for standard door leaf / price for two door leaves
- basic tunnel installation (see table above)
- tunnel installation ZN1 or ZN 2 see table on the next page

#### ROUND, OVAL AND RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt





glossy chrome, brushed chrome, glossy brass, black matt





The hook bolt key lock comes with two pull handles to choose

#### **ADDITIONAL CHARGES**

frame joints at 90 degrees

#### hook bolt lock with hardware

only available for: SP1C.100, SP1C.125

#### oval, rectangular or round pull handle

glossy chrome, brushed chrome, glossy brass, black matt Available for SP1C.100, SP2C.100, SP1C.125, SP2C.125 Pull handle set includes two pcs.

#### finger pull

glossy chrome, brushed chrome, glossy brass, black matt

#### synchronisation

simultaneous opening and closing of the door leaves using only one leaf only available for: SP2C.100, SP2C125

#### Soft closing damper

automatic soft close in the final closing phase; available for SP1C.100, SP1C125 only

One-sided adjustment range for the basic wall min-max (mm)	
0-40;	
40-60;	
60-80;	
80-100;	
100-120;	
120-140	
140-160;	
160-180;	
180-200	
200-220;	
220-240	
240-260;	
260-280	
280-300;	
300-320	
320-340;	
340-360	

• The system of one-sided in-wall installation for double doors ZN2 + 30% extra of the prices in table above

			SINGLE SLIDING SYSTEMS AND DOUBLE POCKET SYSTEMS								
		"60"	"70"	"80"	"90"	"100"	2 x "60"	2 x "70"	2 x "80"	2 x "90"	2 x "100"
<b>S</b> 1	Door width	644	744	844	944	1044	1288	1488	1688	1888	2088
<b>S2</b>	Frame opening width	602	702	802	902	1002	1202	1402	1602	1802	2002
<b>S</b> 3	Pocket width	1318	1518	1718	1918	2118	2538	2938	3338	3738	4138
<b>S4</b>	Frame cover width Architraves 6cm /Architraves 8cm	744 <i>/</i> 784	844 / 884	944 <i> </i> 984	1044 <i>/</i> 1084	1144 <i>/</i> 1184	1344 <i>/</i> 1384	1544 / 1584	1744 / 1784	1944 <i> </i> 1984	2144 / NA
<b>S</b> 5	Opening width in the pocket	655	755	855	955	1055	1255	1455	1655	1855	2055
<b>S6</b>	Opening width in the wall	1338	1538	1738	1938	2138	2558	2958	3358	3758	4158
H1	Door height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Frame cover height Architraves 6cm /Architraves 8cm	2092/ 2112	2092/ 2112	2092 / 2112	2092 / 2112	2092/ 2112	2092/ 2112	2092 / 2112	2092/ 2112	2092/ 2112	2092 / NA
H3	Pocket height	2115	2115	2115	2115	2115	2115	2115	2115	2115	2115
H4	Frame opening height	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021
H5	Opening height in the wall	2125	2125	2125	2125	2125	2125	2125	2125	2125	2115



Photo: Wall-mounted sliding system

Photo: Pocket sliding system


# SINGLE AND DOUBLE SYSTEMS

## **POCKET SYSTEMS**

#### **SP1C.100** (left, AWERS obverse glazing)

#### Fixed range of 100 mm

Pocket thickness before gypsum board installation - 75 mm




For UNO PREMIUM, UNO LUX, ALTAMURA 1 only, and for all stile door leaves. The system does not come with dust brushes (not required).


#### **SP1C.125** (left, AWERS obverse glazing)

#### Fixed range of 125 mm

Pocket thickness before gypsum board installation - 100 mm



Only for use with panel door leaves which are supplied with a glass frame. The system includes gray dust brushes.

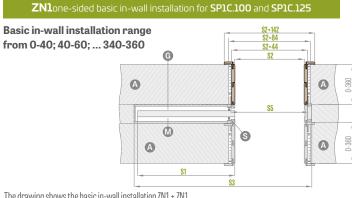


The drawing shows the basic in-wall installation ZN1 + ZN1.

#### SP2C.125 (AWERS obverse glazing)

#### Fixed range of 125 mm

Pocket thickness before gypsum board installation - 100 mm




Only for use with panel door leaves which are supplied with a glass frame. The system includes gray dust brushes.


#### **SP2C.100** (AWERS obverse glazing)


Fixed range of 100 mm

Pocket thickness before gypsum board installation - 75 mm




For UNO PREMIUM, UNO LUX, ALTAMURA 1 only, and for all stile door leaves. The system does not come with dust brushes (not required).





#### ZN2 one-sided basic in-wall installation for SP2C.100 and SP2C.125






The drawing shows the basic in-wall installation ZN2 + ZN2.



## **REBATED AND NON-REBATED**

#### **USEFUL INFORMATION**

#### DOUBLE-LEAF DOORS



- The double-leaf doors are made according to available models of the flush single leaf doors, STILE doors with respective features: colour, finish (STANDARD, SOFT), glazing etc.
- Double-leaf doors available in CPL 0.2 & CPL 0.7
- Passive doors use pull latches.
- Under "60" width passive door available in the full plain version only side panel (see drawing below).
- Side panels are made in the STANDARD edge flush technology. Available with the "honeycomb" filling as standard or solid core for extra charge. Grain direction of the side panels is vertical.
- · Both active and inactive door leaves come with lippings.
- Lippings in CPL 0.7 door leaves are laminated with CPL 0.2
- The double-leaf doors in non-rebated technology is available with a magnetic lock only.
- Double non-rebated leaf doors come with an adjustable door frame only.
- Electric door strike is not available for the double-leaf doors.


#### AVAILABLE DOOR LEAF WIDTHS

• Panel and stile DOUBLE-LEAF DOORS from "120" to "190"\*\* and mixes with full plain side panels

60 + <mark>30*</mark> 70 + <mark>30*</mark> 80 + <mark>30*</mark>	90 <b>+</b> <mark>30*</mark>	100 + 30*
60 <b>+ 40</b> * 70 <b>+ 40</b> * 80 <b>+ 40</b> *	90 <b>+ 40</b> *	100 + 40*
60 + <mark>50*</mark> 70 + <mark>50*</mark> 80 + <mark>50*</mark>	90 <b>+</b> 50*	100 + 50*

- \* Side panel available in standard technology only as a full plain version
- \*\* For "180" non-rebated doors

#### DOUBLE-LEAF DOOR PRICE:

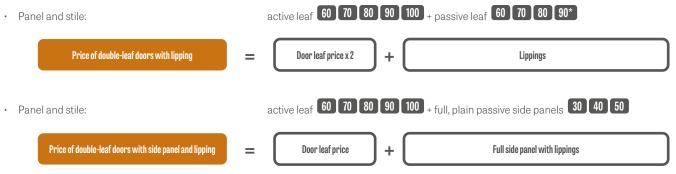



• Prices of fixed and adjustable door frames for double-leaf doors + 30%

# DOUBLE-LEAF DOORS

#### **NON-REBATED**

### NON-REBATED DOUBLE-LEAF DOORS WITH ADJUSTABLE DOOR FRAME

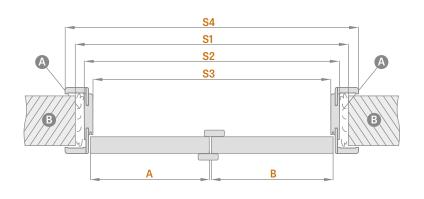



A-foam B-wall C-floor

	Adhashalda daan ƙasara				NON-RE	BATED DO	UBLE-LEA	F DOORS			
	Adjustable door frame	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"
A+B	Door leaf width	988	1088	1188	1288	1388	1488	1588	1688	1788	1888
<b>S1</b>	Opening width in the wall	1061	1161	1261	1361	1461	1561	1661	1761	1861	1961
<b>S2</b>	Frame outer width	1021	1121	1221	1321	1421	1521	1621	1721	1821	1921
<b>S</b> 3	Frame opening width	977	1077	1177	1277	1377	1477	1577	1677	1777	1877
<b>S</b> 4	Frame cover width Strip 6 cm /Strip 8 cm	1119 <i>/</i> 1159	1219 <i>/</i> 1259	1319 <i>/</i> 1359	1419 <i>/</i> 1459	1519 / 1559	1619 <i>/</i> 1659	1719/ 1759	1819 <i>/</i> 1859	1919 <i> </i> 1959	2019 / 2059
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Opening height in the wall	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073
H3	Frame outer height	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053
H4	Frame opening height	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031
H5	Frame cover height Strip 6 cm /Strip 8 cm	2102 / 2122	2102/ 2122	2102/ 2122	2102 / 2122	2102/ 2122	2102 / 2122	2102/ 2122	2102/ 2122	2102/ 2122	2102 / 2122

#### DOUBLE-LEAF DOORS - SYMMETRIC



### DOUBLE-LEAF DOORS



#### DOUBLE-LEAF DOORS - WITH PLAIN SIDE PANEL







### L DOUBLE-LEAF DOORS

#### REBATED

### REBATED DOUBLE-LEAF DOORS WITH ADJUSTABLE DOOR FRAME

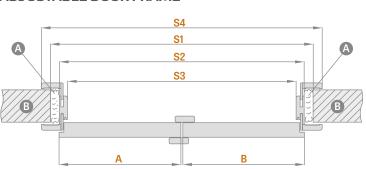





A-foam B-wall C-floor

	Adiustable daan faama					DOUB	LE-LEAF I	DOORS				
	Adjustable door frame	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"
A+B	Door leaf width	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	1988
<b>S1</b>	Opening width in the wall	1034	1134	1234	1334	1434	1534	1634	1734	1834	1934	2034
S2	Frame outer width	994	1094	1194	1294	1394	1494	1594	1694	1794	1894	1994
<b>S</b> 3	Frame opening width	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950
<b>S</b> 4	Frame cover width Architraves 6 cm /Architraves 8 cm	1092/ 1132	1192 / 1232	1292 / 1332	1392 / 1432	1492 / 1532	1592 / 1632	1692 / 1732	1792 / 1832	1892 / 1932	1992 / 2032	2092/ 2132
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Opening height in the wall	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060
H3	Frame outer height	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
H4	Frame opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018
H5	Frame cover height Strip 6 cm /Strip 8 cm	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089/ 2109	2089 / 2109	2089/ 2109

### REBATED DOUBLE-LEAF DOORS WITH FIXED DOOR FRAME

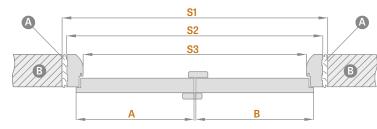



A-foam B-wall C-floor

	Find down former					DOUB	LE-LEAF I	DOORS				
	Fixed door frame	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"
A+B	Door leaf width	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	1988
S1	Opening width in the wall	1068	1168	1268	1368	1468	1568	1668	1768	1868	1968	2068
<b>S2</b>	Frame outer width	1038	1138	1238	1338	1438	1538	1638	1738	1838	1938	2038
<b>S</b> 3	Frame opening width	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Opening height in the wall	2077	2077	2077	2077	2077	2077	2077	2077	2077	2077	2077
H3	Frame outer height	2062	2062	2062	2062	2062	2062	2062	2062	2062	2062	2062
H4	Frame opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018

# FOLDING DOORS



### FOLDING DOOR LEAF

40

B

LEFT DOORS



#### CONSTRUCTION

- the door leaf is composed of two parts joined with concealed hinges
- MDF stile covered with two HDF boards or internal timber stile covered with two HDF boards for PREMIUM and cpl laminates
- honeycomb stabilising filling or solid core filling against an additional charge

#### FINISHING

- · laminated HDF board
- STANDARD leaf edge
- the edge laminated in the same colour as the door leaf or, optionally, plain black edging NEW (transverse larch, black edge with a transverse structure)

#### HARDWARE

- three concealed hinges between leaves
- concealed guiding system in the top and bottom door sections
- A deadbolt lock, euro profile cylinder, economy lock or with a thumb turn

#### **ADDITIONAL CHARGES**

solid core filling


"100" door leaf

black door leaf edge finish **NEW** 



Adjustment range min-max (mm)	
80-100	
100-120	
120-140	
140-160	
160-180	
180-200	
200-220	
220-240	
240-260	

# 2040 2060 2089/2109



Door width	A	В	C	E	F	G	H
"60"	641	614	604	648	688	746*/786**	152.5
"70"	741	714	704	748	788	846*/886**	202.5
"80"	841	814	804	848	888	946*/986**	252.5
"90"	941	914	904	948	988	1046*/1086**	302.5
"100"	1041	1014	1004	1048	1088	1146*/1186**	352.5

\* Architraves 6 cm / \*\* Architraves 8 cm; joints at 45 degrees only

**AVAILABLE DOOR LEAF WIDTHS** 

60 70 80 90 100

Installation vide https://youtu.be/tzccmzy7rvg

Adjustment range min-max (mm)	
260-280	
260-300	
280-300	
300-320	
320-340	
340-360	
360-380	
380-400	
400-420	

1) plain white laminate imitating a painted surface

<sup>2)</sup> special AntiFinger coating to reduce dirt and fingerprints



# COVERT CONCEALED DOOR SYSTEM

#### **OPENING INWARDS AND OUTWARDS**



#### **REBATED AND NON-REBATED DOOR LEAF**

ALUMINIUM CONCEALED DOOR FRAME

#### CONSTRUCTION

- rebated or non-rebated door leaf
- wooden stile covered with two HDF boards .
- honeycomb stabilising filling or solid core filling against an additional . charge

#### **FINISHING**

- HDF board covered with PREMIUM laminate, UV paint or a laminate designed for subsequent paint coating or wallpapering
- door leaf edge made in rebated or non-rebated technology

#### HARDWARE

- required two mortise hinges in the door frame
- magnetic lock in the rebated and non-rebated leaf: with a key, thumb turn cylinder, economy or with a blockade

#### **ADDITIONAL CHARGES**

white door frame 3)

painted door leaf; WHITE TITANIUM UV

solid core filling

additional bottom bar (can be cut by customer up to max 8 cm)

round and square metal sleeves (4 pcs); Finish: brushed nickel, patina, white and black

plastic woodgrain sleeves (4 pcs)

ventilation door cut or grille

"100" door leaf

drop-down gasket 4)

magnetic stop (buffer)<sup>4)</sup> **NEW** (available in six colours p. 132)

_		 

WALNUT PREMIUM



CONCRETE PREMIUM



WHITE TITANIUM UV

HORIZONTAL LARCH NATUR OAK PREMIUM



WHITE PREMIUM 1)

WHITE BARK PREMIUM

GRAPHITE ASH PREMIUM

#### **AVAILABLE DOOR LEAF WIDTHS**



<sup>1)</sup> plain white laminate imitating a painted surface

<sup>2)</sup> used for wallpaper hanging and painting

<sup>3)</sup> aluminium colour frame as standard

<sup>4)</sup> the stop prevents application of a drop-down gasket and vice versa

WHITE PRIMER<sup>2)</sup>


# **COVERT CONCEALED DOOR SYSTEM**

INWARDS OPENING REBATED DOOR LEAF

**REBATED DOOR LEAF** 


#### ALUMINIUM CONCEALED DOOR FRAME

#### STANDARD DIMENSIONS FOR INWARDS OPENING REBATED DOOR LEAVES




Door leaf width	Construction opening width	Frame outer width	Clear opening width
Sd [mm]	So [mm]	Sz [mm]	Sp [mm]
620	700	690	605
720	800	790	705
820	900	890	805
920	1000	990	905
1020	1100	1090	1005


Door leaf height	Construction opening height	Frame outer height	Clear opening height
Hd [mm]	Ho [mm]	Hz (mm)	Hp [mm]
2030	2079	2072	2030



### **GYPSUM BOARD INSTALLATION**



#### **ALUMINIUM DOOR FRAME CROSS-SECTION**



#### **ENCLOSED IN WALL**





40




## **COVERT CONCEALED DOOR SYSTEM**

#### OUTWARDS OPENING NON-REBATED DOOR LEAF

NON-REBATED DOOR LEAF


#### ALUMINIUM CONCEALED DOOR FRAME

#### STANDARD DIMENSIONS FOR OUTWARDS OPENING NON-REBATED DOOR LEAVES




Door leaf width	Construction opening width	Frame outer width	Clear opening width
Sd [mm]	So [mm]	Sz [mm]	Sp [mm]
620	700	690	605
720	800	790	705
820	900	890	805
920	1000	990	905
1020	1100	1090	1005


Door leaf height	Construction opening height	Frame outer height	Clear opening height
Hd [mm]	Ho [mm]	Hz (mm)	Hp [mm]
2020	2069	2062	2020



#### **ALUMINIUM DOOR FRAME CROSS-SECTION**



#### **GYPSUM BOARD INSTALLATION**



#### **ENCLOSED IN WALL**








#### **GENRAL INFORMATION**


The top and side lights are preassembled and glazed with the VSG 331 safety glass in a frosted or transparent variant. (Please state your choice of glass when placing orders)

#### **AVAILABLE PRODUCT PACKAGES**

SINGLE LEAF DOORS with top, side and corner lights



#### DOUBLE-LEAF DOORS with top, side and corner lights



- \*\* Ranges available as for the standard adjustable rebated door frames, see p. -163
- The matt VSG 331 or transparent VSG 331 safety glass is included and the price is the same for all laminates and ranges for rebated door frames.
- Prices apply to lights fitted on 6 and 8 cm architraves.
- To paint coated lights + 50% charge applies
   NEW
- Fitting strips for lights are fixed with headless pins which are seen as small dark spots once nailed (especially in white laminates and paint coated lights).
- · Lighting not available in CPL 0.2 and CPL 0.7 laminates


#### LIGHTING CATEGORIES

FOR FIXED DOOR FRAMES

FOR ADJUSTABLE DOOR FRAMES

FOR SINGLE LEAF DOORS

FOR DOUBLE-LEAF DOORS

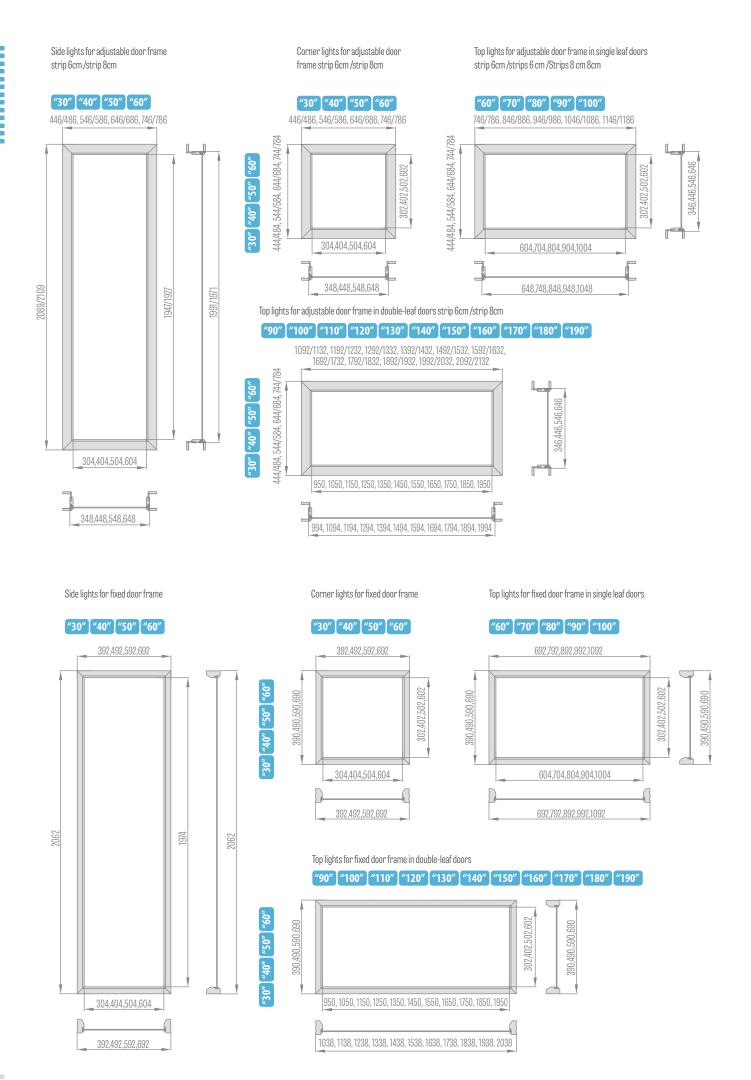



- The adjustable and fixed rebated door frames can be used for all types of ERKADO internal doors made in both flush and STILE technologies.
- The adjustable non-rebated door frames can be used for internal doors made in both flush and STILE technologies. These door frames are supplied . with three concealed hinges.
- The door frame is made with high quality MDF board and covered with durable wood grain film or coated with durable UV paint. .
- Depending on the technology, the door frames are laminated with: FINISH, GREKO, CPL, PREMIUM and UV paint. .
- The frames for STILE doors have a third hinge as standard. .
- Each adjustable and fixed frame comes complete with disassembled frame components, hinges and screws. The components are supplied with pre-. drilled holes for fixing.
- · Each set is enclosed with assembly manual and warranty certificate.
- . The fixed door frame for Herse collection is rectangular and its core is made of glulam timber.

#### ADJUSTABLE DOOR FRAME **REBATED DOOR LEAVES**




#### **ADJUSTABLE DOOR FRAME** NON-REBATED DOOR LEAVES



#### STANDARD SQUARE FOR ADJUSTABLE DOOR FRAME Strip 6 cm / Strip 8 cm





#### ADJUSTABLE OVERLAY DOOR FRAME FOR STEEL DOOR FRAMES




#### STAND FIXED DOOR FRAME **REBATED DOOR LEAVES**



#### SQUARE WITH EXTENDED TONGUE FOR ADJUSTABLE DOOR FRAME Strip 6 cm / Strip 8 cm









#### **FIXED DOOR FRAME** "60" "70" "80" "90" "100" A B


#### TUNNEL TYPE ADJUSTABLE DOOR FRAME

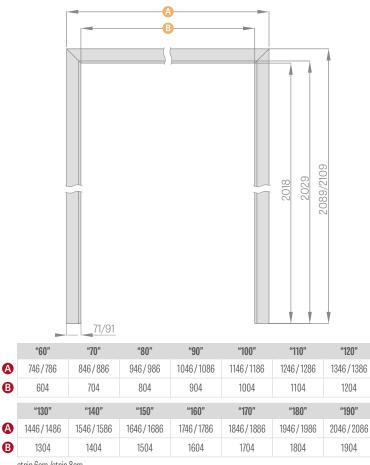

strip 6cm /strip 8cm

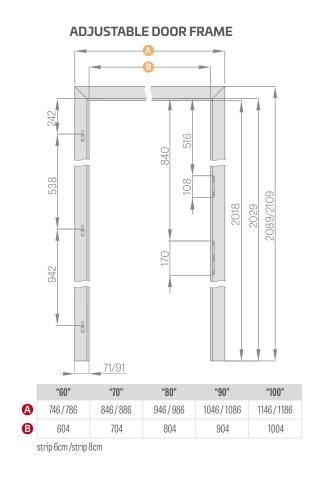


CASING DOOR FRAME

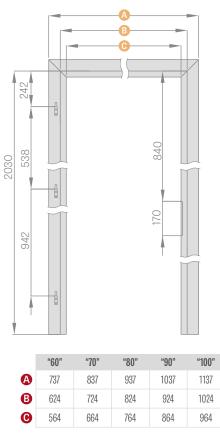

#### FIXED DOOR FRAME FOR DOUBLE-LEAF DOORS


#### ADJUSTABLE DOOR FRAME FOR DOUBLE-LEAF DOORS






	"90"	"100"	"110"	"120"	"130"	"140"
A	1038	1138	1238	1338	1438	1538
B	950	1050	1150	1250	1350	1450
	<b>#1EO</b> 7	#1007	<b>#170</b> "	#10.01	#100T	
	"150"	"160"	"170"	"180"	"190"	
A	1638	1738	1838	1938	2038	

#### FIXED DOOR FRAME FOR GLASS DOORS

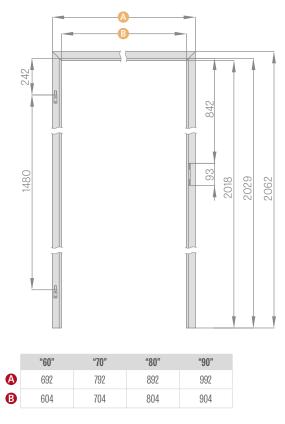

10 mm pin hinge for glass panes frames




	"90"	"100"	"110"	"120"	"130"	"140"
A	1092/1132	1192/1232	1292/1332	1392/1432	1492/1532	1592/1632
B	950	1050	1150	1250	1350	1450
	"150"	"160"	"170"	"180"	"190"	
A	1692/1732	1792/1832	1892/1932	1992/2032	2092/2132	
B	1550	1650	1750	1850	1950	
	strip 6cm /strip	8cm				

D

942

#### ADJUSTABLE DOOR FRAME FOR GLASS DOORS

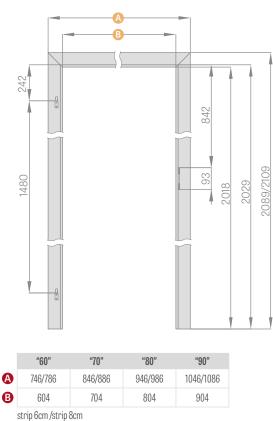

## ] [ TUNNEL TYPE ADJUSTABLE DOOR FRAME

#### **REBATED / NON-REBATED**

#### **TUNNEL TYPE DOOR FRAMES**

The tunnel type door frames are adjustable door frames without any hardware. They are made with a top strip and two vertical strips.

They can be used to finish door openings and safeguard wall corners, but mainly are fitted for interior decoration effects.

The tunnel type adjustable rebated door frames are also used in the ERKADO sliding systems.

The tunnel type adjustable non-rebated door frames are not used in the sliding systems.

#### Depending on the system, we use the following rebated tunnels:

TUNNEL FOR SP1N	Wall-mounted single sliding system
TUNNEL FOR SP2N	Wall-mounted double sliding system
TUNNEL FOR SP1C.100	Single "100" pocket sliding system
TUNNEL FOR SP2C.100	Double "100" pocket sliding system
TUNNEL FOR SP1C.125	Single "125" pocket sliding system
TUNNEL FOR SP2C.125	Double "125" pocket sliding system
Encasing ZN1	Wall encasing for one side of the single leaf systems SP1C.100 and SP1C.125
Encasing ZN2	Wall encasing for one side of the double-leaf systems SP2C.100 i SP2C.125

		ADJUSTABLE REBATED TUNNELS												
	"60"	"70"	"80"	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"
Opening width in the wall	688	788	888	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	1988
Tunnel outer width	648	748	848	948	1048	1148	1248	1348	1448	1548	1648	1748	1848	1948
Tunnel opening width	604	704	804	904	1004	1104	1204	1304	1404	1504	1604	1704	1804	1904
Tunnel cover width Strip 6 cm /Strip 8 cm	746 / 786	846/ 886	946 / 986	1046/ 1086	1146 <i>/</i> 1186	1246 / 1286	1346 / 1386	1446/ 1486	1546 <i>/</i> 1586	1646 / 1686	1746 / 1786	1846/ 1886	1946 / 1986	2046/ 2086
Opening height in the wall	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060
Tunnel outer height	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
Tunnel opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018
Tunnel cover height Strip 6 cm /Strip 8 cm	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109


					ADJUS	TABLE N	ON-REB	ATED TU	NNELS				
	"60"	"70"	"80"	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"
Opening width in the wall	713	813	913	1013	1113	1213	1313	1413	1513	1613	1713	1813	1913
Tunnel outer width	673	773	873	973	1073	1173	1273	1373	1473	1573	1673	1773	1873
Tunnel opening width	629	729	829	929	1029	1129	1229	1329	1429	1529	1629	1729	1829
Tunnel cover width strip 6 cm /strip 8 cm	771/ 811	871/ 911	971 <i>/</i> 1011	1071/ 1111	1171/ 1211	1271/ 1311	1371/ 1411	1471/ 1511	1571/ 1611	1671/ 1711	1771/ 1811	1871/ 1911	1971/ 2011
Opening height in the wall	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073
Tunnel outer height	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053
Tunnel opening height	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031
Tunnel cover height strip 6 cm /strip 8 cm	2102/ 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102/ 2122	2102 / 2122					

**STEEL DOOR FRAME** 

#### FOR GRAF STILE, PANEL & GLASS DOOR LEAVES


#### **ADJUSTABLE STEEL DOOR FRAME** (OVERLAPPING), 1.5 mm wide sheet metal 1.5 mm

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001

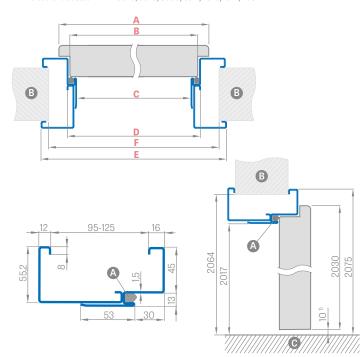

SQUARE STEEL DOOR FRAME

(LARGE), sheet metal 1.2 mm Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001

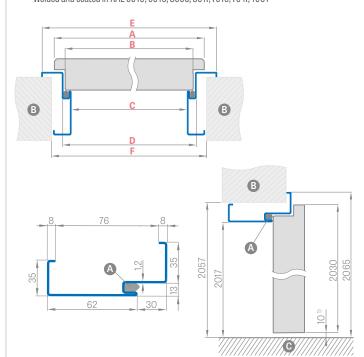

<sup>1)</sup> allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)

Door width	A	В	C	D	E	F
"60"	644	617	601	627	717	695
"70"	744	717	701	727	817	795
"80"	844	817	801	827	917	895
"90"	944	917	901	927	1017	995
"100"	1044	1017	1001	1027	1117	1095

Adjustment Range min-max (mm)

> 95-125 125-155

155-185

185-215


215-245

245-275

275-305

Door width	A	В	C	D	E	F
"60"	644	617	601	627	697	681
"70"	744	717	701	727	797	781
"80"	844	817	801	827	897	881
"90"	944	917	901	927	997	981
"100"	1044	1017	1001	1027	1097	1081

FITTING THE SQUARE FRAME	
--------------------------	--



#### **ADDITIONAL CHARGES**

C-floor

electric door strike

door closer reinforcement

galvanised sheet steel

adjustable "100" door frame

fixed "100" door frame

door frame for double-leaf doors


non-typical RAL (intensive, pearly and metallic colours not included)

				RAL				
RAL 9003	RAL 9010	RAL 9016	RAL 8003	RAL 8017	RAL 7016	RAL 7022	RAL 7047	RAL 1001

# ] [ ADJUSTABLE OVERLAY DOOR FRAME

#### FOR STEEL DOOR FRAMES

### HANDLE POSITION IN AN OVERLAY DOOR FRAME



L – distance between the handle centre line and the frame strip edge

L = 23 mm for panel doors, SYDNEY or QUBIK handle, p. 124

L = 28 mm for STILE frame doors (all interior door handles presented in the offer are available)

NOTE: Check the handle face plate dimensions before installation.


Adjustable overlay door frame of over 200 mm consists of two components, and a frame of over 320 mm consists of three elements.

#### **AVAILABLE WIDTHS FOR OVERLAY FRAMES:**




	Adjustment range min-max (mm)
	80-100
	100-120
bone	120-140
com	140-160
<u> </u>	160-180
	180-200
	200-220
nts	220-240
bone	240-260
com	260-280
- 2	280-300
	300-320
	320-340
ents	340-360
bone	360-380
COM	380-400
	400-420
	420-440

#### **OVERLAY DOOR FRAME DIAGRAM**



Door width	A	В	C	D	E	F	G
"60"	644	624	618	564	592	598	737
"70"	744	724	718	664	692	698	837
"80"	844	824	818	764	792	798	937
"90"	944	924	918	864	892	898	1037
"100"	1044	1024	1018	964	992	998	1137

F – min dimension of the steel frame opening, on which to fit an overlay door frame. This dimension can exceed the recommended one by max 20 mm. For greater frame opening, ensure the architraves cover the wall appropriately.



<sup>1)</sup> allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)




B- wall
handle
range from 80 mm to 255 mm

• 120 mm extension for overlay frame


- · Standard square for an overlay frame
- · Square with extended tongue
- Tunnel type door frame for widths of 60, 70, 80, 90, 100 are at the price of the adjustable overlay door frame.
- The tunnel is of the same dimensions as the overlay door frame and is not pre-drilled for hinge or door striker plate, but is supplied with a gasket.

# ][ REVERSE DOOR FRAME


#### **REVERSE DOOR LEAVES**

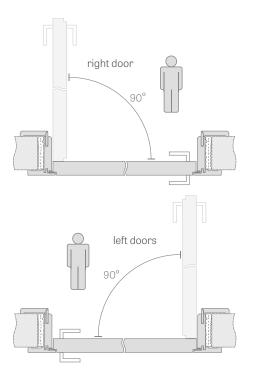

#### ADJUSTMENT RANGE FOR REVERSE DOOR FRAME



	Adjustment range min-max (mm)
_	75-95 95-115
	115-135
ш	135-155
1 component	155-175
	175-195
10	195-215
	215-235
	235-255
S	255-275
nen	275-295
components	295-315
- <b>2</b> 00	315-335
_	335-355



<sup>1)</sup> allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)

Door width	A	В	C	D	E	F	G
"60"	624	644	652	696	736	834	791
"70"	724	744	752	796	836	934	891
"80"	824	844	852	896	936	1034	991
"90"	924	944	952	996	1036	1134	1091
"100"	1024	1044	1052	1096	1136	1234	1191


- The frame for reverse door leaves is available only with an 8 cm square joined at 45 degrees.
- The frame contains two so-called concealed hinges invisible when the leaf is closed
- Available decors within the colour group: GREKO, PREMIUM, CPL and WHITE TITANIUM UV varnish
- The UV WHITE TITAN varnished door frame is also available at an extra cost with an 8 cm corner joined at 90 degrees (not available for the 75-95 mm range)
- Can be replaced with hinges and catch plate in black NEW
- 120 mm extension for reversible laminate frame
- Movable square with 2 cm leaf extension and standard corner for adjustable frames in all laminates
- The door frame above 255 mm is composed of two parts
- Top panels can be glued to the wall for an additional charge page 134
   NEW

## ] [ ADJUSTABLE DOOR FRAME

### NON-REBATED DOOR LEAVES

#### ADJUSTABLE DOOR FRAME


RANGE 80-95mm strip 6 cm / strip 8 cm



The square tongue is to be cut by customer to required size, for door frames within 80-95mm range

#### ADJUSTABLE DOOR FRAME RANGE


strip 6 cm / strip 8 cm



	Adjustment range min-max (mm)
	80-95
П	95-115
	115-135
	135-155
ant	155-175
bon(	175-195
component	195-215
-	215-235
	235-255
	255-275
	275-295
	295-315
components <sub>1</sub>	315-335
	335-355
	355-375
- <b>2</b> c	375-395
_	395-415


- Adjustable rebate-free door frame in CPL0.2 is also used in combination with doors in CPL0.7
- Can be replaced with hinges and catch plate in black
   NEW
- Joints at 90 degrees possible for door frames with the 8 cm
   architexus only Additional change, frame initiate t 90°
- architraves only. Additional charge frame joints at 90°
  The door frame above 295 mm is composed of two parts
- Prices of adjustable door frames for double-leaf doors + 30%
- 120 mm extension for rebate-free, laminated door frame
- Movable square with 2 cm leaf extension and standard corner for adjustable frames in all laminates

#### ADJUSTABLE DOOR FRAME DIAGRAM



Door width	A	В	C	D	E	F
"60"	644	629	651	673	714	771*/811**
"70"	744	729	751	773	814	871*/911**
"80"	844	829	851	873	914	971*/1011**
"90"	944	929	951	973	1014	1071*/1111**
"100"	1044	1029	1051	1073	1114	1171*/ 1211**

 $^{*}\,\mathrm{strip}\,6\,\mathrm{cm}\,/\,^{**}\,\mathrm{strip}\,8\,\mathrm{cm}$ 



<sup>1)</sup> allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)



- Tunnel type door frame for widths of 60, 70, 80, 90, 100 are at the price of the adjustable overlay door frame.
- Tunnel type door frame for widths of 110, 120, 130, 140, 150, 160, 170, 180, 190 are at the price of the adjustable door frame for rebated double-leaf doors (see Table p. 150)
- Top panels glued to the wall (only for frames with 8 cm corner) p. 134

#### DOOR FRAME A JOINTS

90°

45°

strip 8 cm

strip

6 cm or 8 cm

FIXED DOOR FRAME REBATED DOOR LEAVES

][

 90
 90

 1
 90


 1
 1

 50FT fixed door frame
 STAND fixed door frame

**MASKING STRIP 8 mm** 


**FIXED DOOR FRAME** 








80







#### **QUARTER ROUND**



**ELECTRIC DOOR STRIKE** 





<sup>1)</sup> allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)


Door width	A	В	C	D	E
"60"	644	618	604	692	722
"70"	744	718	704	792	822
"80"	844	818	804	892	922
"90"	944	918	904	992	1022
"100"	1044	1018	1004	1092	1122

#### A foam B wall O floor D rubber gasket

- Fixed door frame for double-leaf doors + 30%
- Non-rebated fixed door frame NA
- The fixed frame, architrave and clip-on square in CPL 0.2 are also used in the set for door leaves in CPL 0.7

SKIRTING BOARD length 2,40 mb





- The skirting board is made of moisture resistant MDF board. Available variants: WHITE TITANIUM UV paint, laminates: GREKO, ST CPL, PREMIUM and in base laminate to be paint coated.
- Fitting method: bonding to wall

#### SOFT AND STAND FIXED DOOR FRAME DIAGRAM

10

CLIP-ON SQUARE 6 cm and 8 cm (3 pcs. of clips supplied)





#### **REBATED DOOR LEAVES**




ADJUSTABLE DOOR FRAME ABOVE 280 mm


Adjustable door frame above 280 mm is composed of two parts (not within the 260-300mm range), and above 400 mm - three parts (they are not of equal size).

#### ADJUSTABLE DOOR FRAME RANGE


strip 6 cm / strip 8 cm



#### **DOOR FRAME JOINTS**




#### ADJUSTABLE DOOR FRAME DIAGRAM

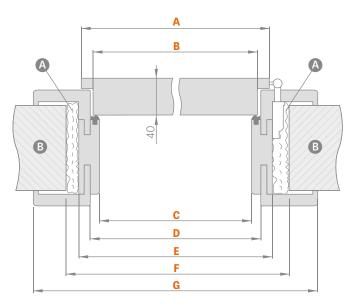

Door width	A	В	C	D	E	F	G
"60"	644	618	604	626	648	688	746*/786**
"70"	744	718	704	726	748	788	846*/886**
"80"	844	818	804	826	848	888	946*/986**
"90"	944	918	904	926	948	988	1046*/1086**
"100"	1044	1018	1004	1026	1048	1088	1146*/1186**

\* strip 6 cm / \*\* strip 8 cm



<sup>1)</sup> allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)

A foam B wall O floor D rubber gasket

	Adjustment range min-max (mm)
Г	80-100
1 component	100-120
	120-140
	140-160
	160-180
	180-200
	200-220
	220-240
	240-260
	260-280
	260-300
Г	280-300
ts I	300-320
nenoc	320-340
2 comp	340-360
	360-380
	380-400
	400-420
<b>3</b> components	

- The CPL 0.2 adjustable rebated frame is also used with CPL 0.7 door leaves
- Joints at 90 degrees possible for door frames with the 8 cm strips only. Additional charge for joining at 90 degrees.
- Electric door strike
- Door closer reinforcement
- Prices of fixed and adjustable door frames for double-leaf doors + 30 %
- · Movable square with 2 cm leaf extension and standard corner for adjustable frames in all laminates
- Extension 120 mm for adjustable frame, laminated and CPL 0.2 and lacquered
- It is possible to produce frames up to the range of 500-520 mm
- Tunnel type door frame for both rebated and non-rebated door widths of 60, 70, 80, 90, 100 are at the price of the rebated adjustable door frames.
- Tunnel type door frame for both rebated and non-rebated door widths of 110, 120, 130, 140, 150, 160, 170, 180, 190 are at the price of the adjustable door frame for rebated double-leaf doors
- Top panels glued to the wall (only for frames with 8 cm corner) p. 134

163

# **ERKADD**

#### ERKADO Sp. z o.o.

Gościeradów-Folwark Osiedle POM 8 23-275 Gościeradów POLAND NIP 715-194-27-90 000000471 Register number E-mail: biuro@erkado.pl www.erkado.pl

#### **INTERIOR DOORS**

Phone +48 15 838 10 57 Fax +48 15 838 18 84

#### **EXTERIOR DOORS**

Phone +48 15 845 33 88 Fax +48 15 845 34 05

#### www.erkado.pl

The warranty certificate and assembly manual are attached with products. This Product Guide is for reference only, and shows current prices and product availability. The manufacturer reserves the right to modify prices and product availability without prior notice. Actual colours in colour charts can differ from these indicated in this Product Guide. Please consult the colours with original colour charts available at our dealer centres. The photos in the Product Guide are for reference only and dimensional proportions of some components can occur for different door leaf widths. We reserve the right to printing mistakes.

The Product Guide is not an offer in legal terms and is published only for reference.

Edition I/2021/A applies as of 02/03/2021.

The door should be selected on the basis of a basic design of a facility, prepared considering all applicable standards and provisions of law, as well as frequency and conditions of use. ERKADO offers several variants, but leaves the final choice to the Buyer, because only the Buyer or their representatives knows the purpose and conditions of use for the product to be ordered.

Certificates can be downloaded from our website www.erkado.pl



Scan your code and download this Product Guide to your smartphone/tablet (pdf)

כטוסער's אוס אידווו נווב דרטטטכני טעוטב כמודטווברו דטרודטוב סרוקווומו. דרכסמוכט אישאי וווטונאטוסו גטווווטו